

SINCECURA

anti fall engineering



LIGHTWEIGHT
PORTABLE
GANTRIES

2022



COMMERCIAL, TECHNICAL AND ADMINISTRATIVE OFFICES

Corso Roma, 40 • 12038 Savigliano (CN) • Italy

commerciale@sinecuraengineering.it

amministrazione@sinecuraengineering.it

ingegneria@sinecuraengineering.it

tecnico@sinecuraengineering.it

+39 333.7428737 • +39.0172.750103

Fax: +39.0172.750387






WLL 1500 KG

WLL 1000 KG

WLL 500 KG

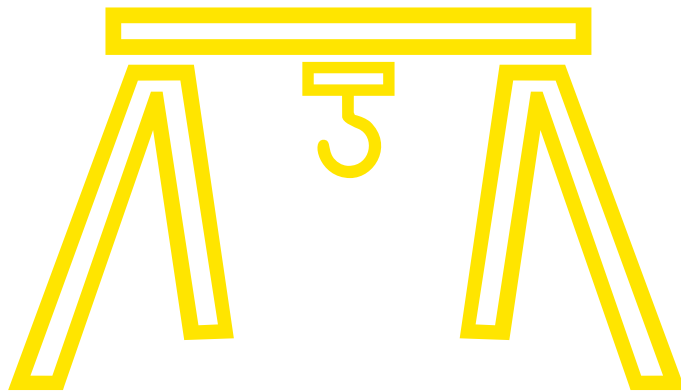

LIGHTWEIGHT PORTABLE GANTRIES


05	Introduction	
07	COMPACT GANTRIES	38 STANDARD GANTRIES
8	KSB	39 ASB
16	KSB-LE	48 LSB
24	FSB	55 Modules of Standard Gentries
34	Beams for Compact gentries	61 HSB
36	Modules of Compact gentries	67 Modules of HSB
		68 BAS
		75 Modules of BAS
		77 LIFTING BEAMS
		78 TRA
		80 TRB
		82 TRD
		86 TRO



Gantry comprises BEAM and set of 2 SUPPORTS.



Gantry can be used for **load handling**, **safeguarding of workers** and **evacuation of workers**.

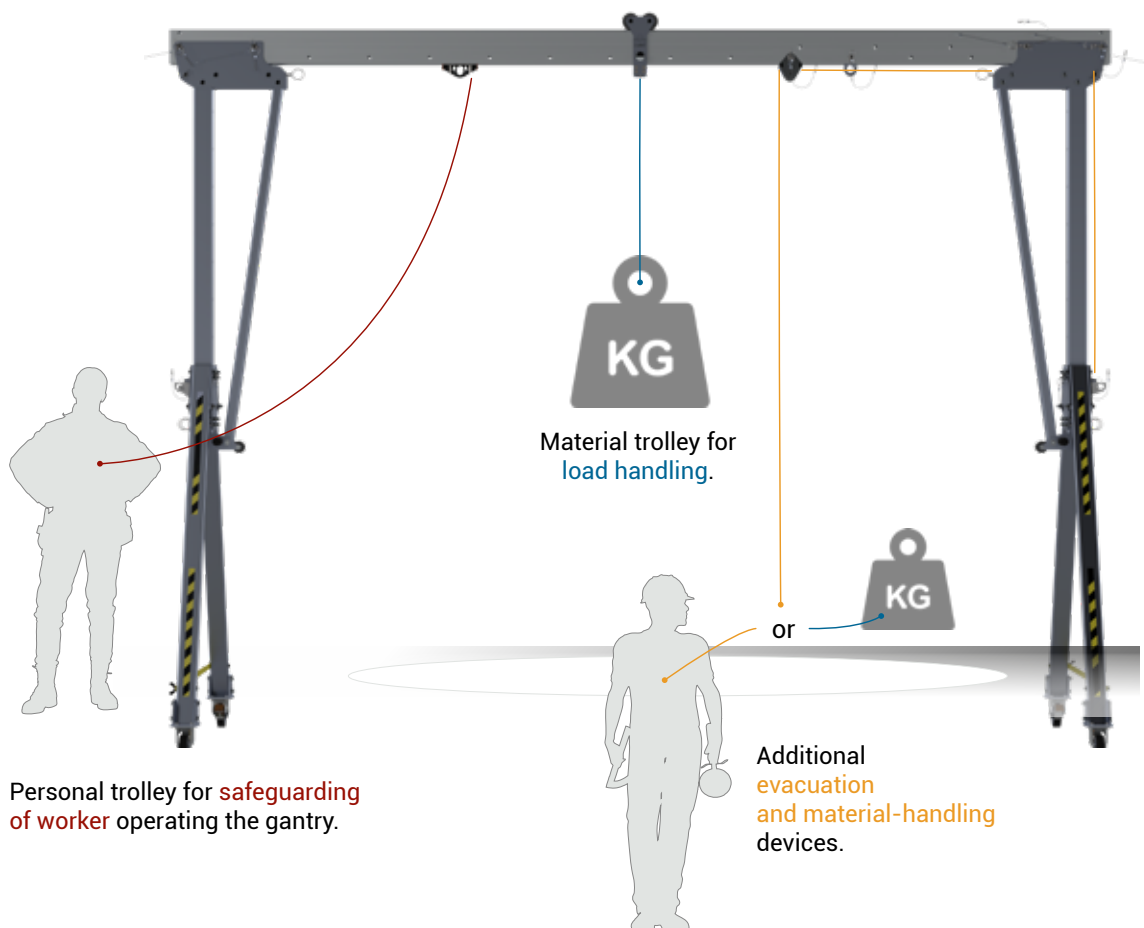



COMPACT GANTRIES

7 COMPACT GANTRIES

8 KSB

16 KSB-LE

24 FSB

34 Beams for Compact gantries

36 Modules of Compact gantries



1.



2.



3.

COMPACT GANTRY KSB KIT

Each standard compact gantry kit comprises:

1. Two supports equipped with swivel wheels with brake,
2. beam of a required length
3. removable trolley.



COMPACT
GANTRY
CRANE

KSB



UP TO
500kg

EN 13001
EN 15011



FALL PROTECTION
FOR 2 USERS

EN 795/B:2012
CEN/TS 16415/B:2013



HEIGHT:
BEAM LENGTH:

2,1m to 3m
2m to 6m



REMOVABLE TROLLEY

KSB 100-350-000



BEAM

KSB xxx-001
xxx - length



**WORK LINE GUIDE
ROLLER**

KSB 100-310



2 SUPPORTS


KSB 100-101-1



WHEELS

KSB100-900

technical data

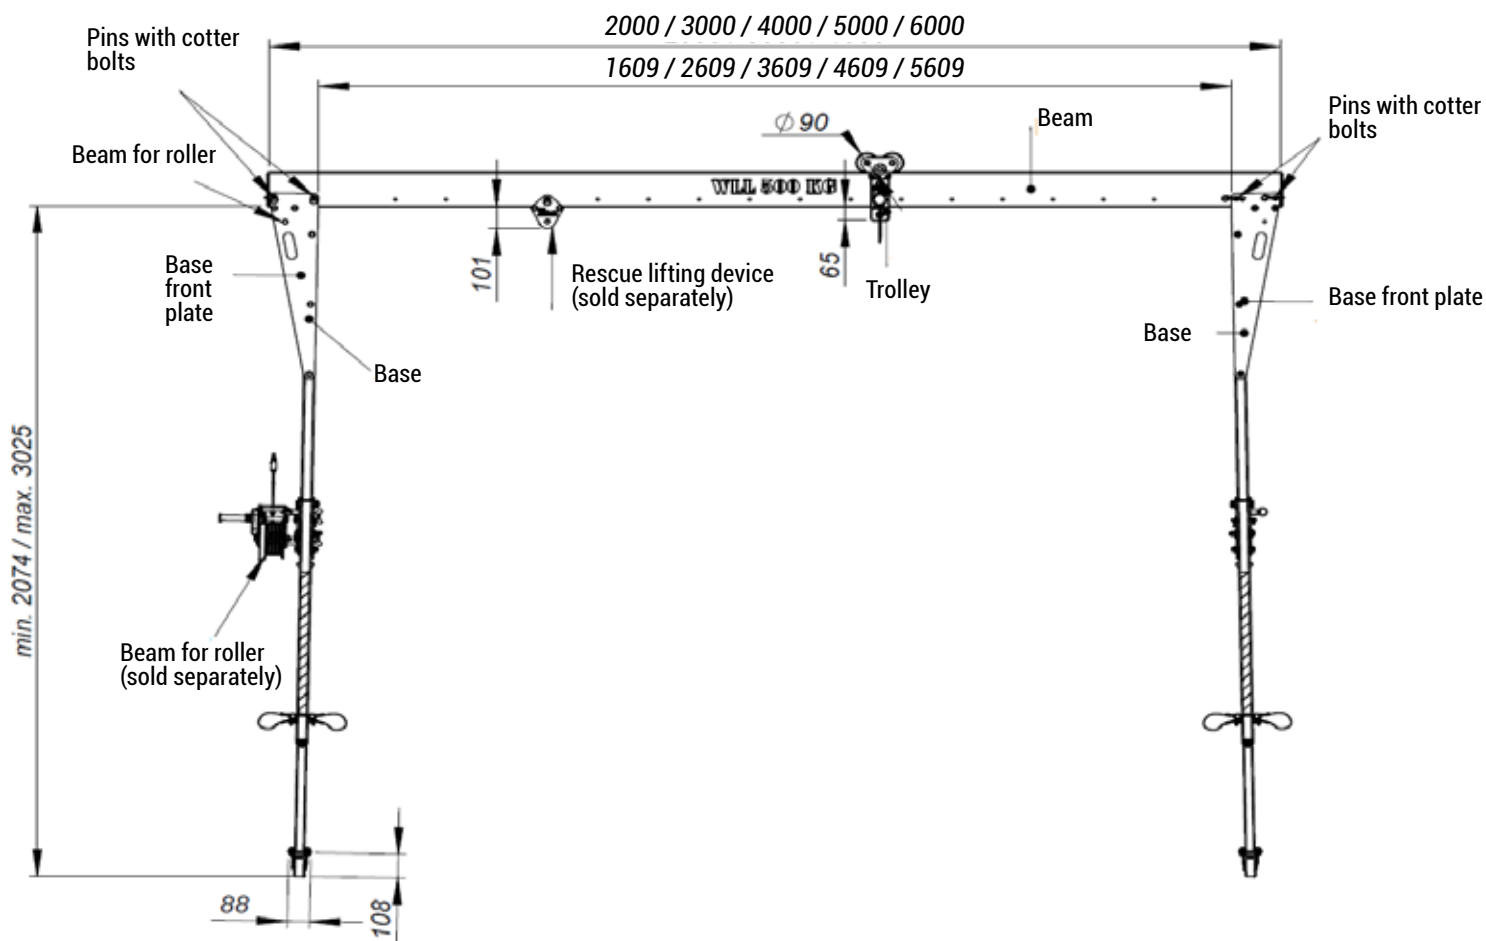

Compact gantry KSB comprises a beam and two detachable supports fixed by pins with cotter bolts and trolley.

1. Beams


ref. no. KSB200-001 - 2-meter beam
 ref. no. KSB300-001 - 3-meter beam
 ref. no. KSB400-001 - 4-meter beam
 ref. no. KSB500-001 - 5-meter beam
 ref. no. KSB600-001 - 6-meter beam

2. Supports

K1 - one support type available (height: 2.1 - 3.0 mm)
 with set of swivel wheels with brake, dia. 80mm

3. Trolley

ref. no. KSB100-350-000
 Made of aluminium alloy, stainless steel and polyamide parts.
 Trolley can be locked using knob by positioning on the beam.

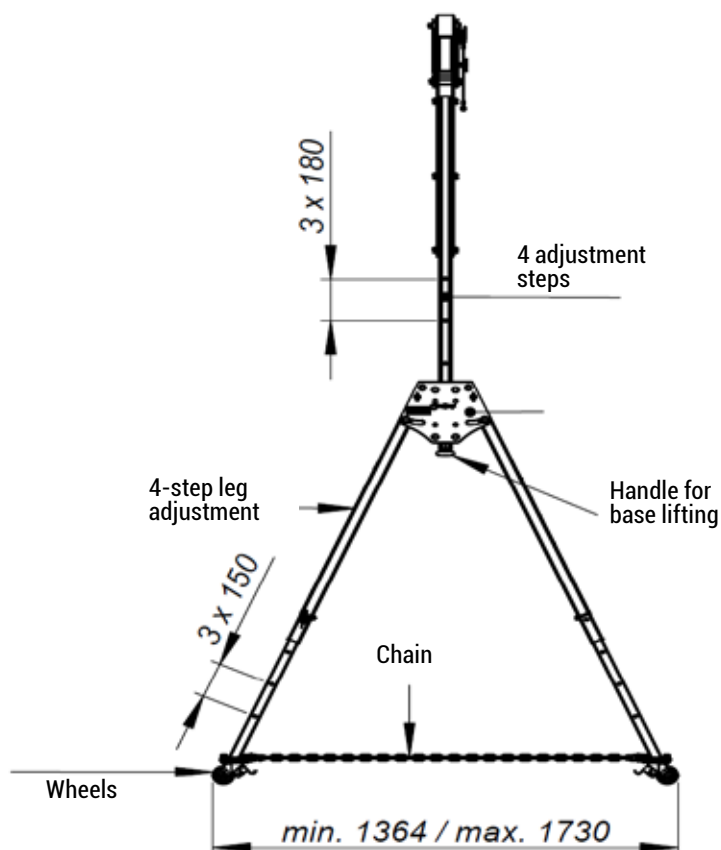




LOCK OF VERTICAL
PROFILE BY PIN WITH
COTTER BOLT 12MM

KSB100-180



Ø 80 POLYURETHANE + ALUMINIUM
KSB100-900

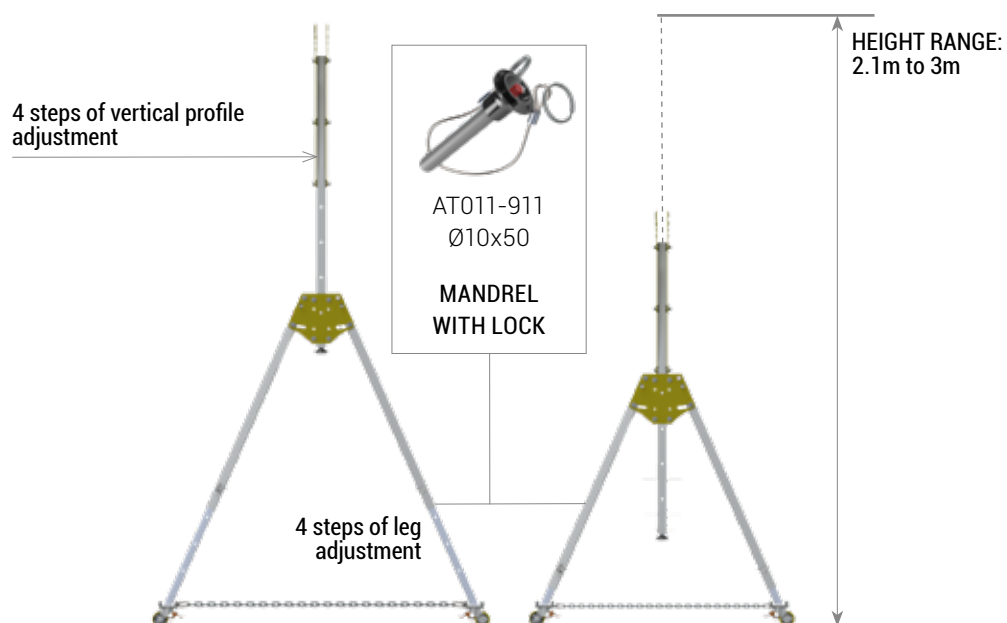

unfolding

1

Gantry parts prepared for assembly.
Deploy bases.



2

Move base legs apart.




3

Place gantry legs by locking with the other pin.



4

Mount additional accessories.

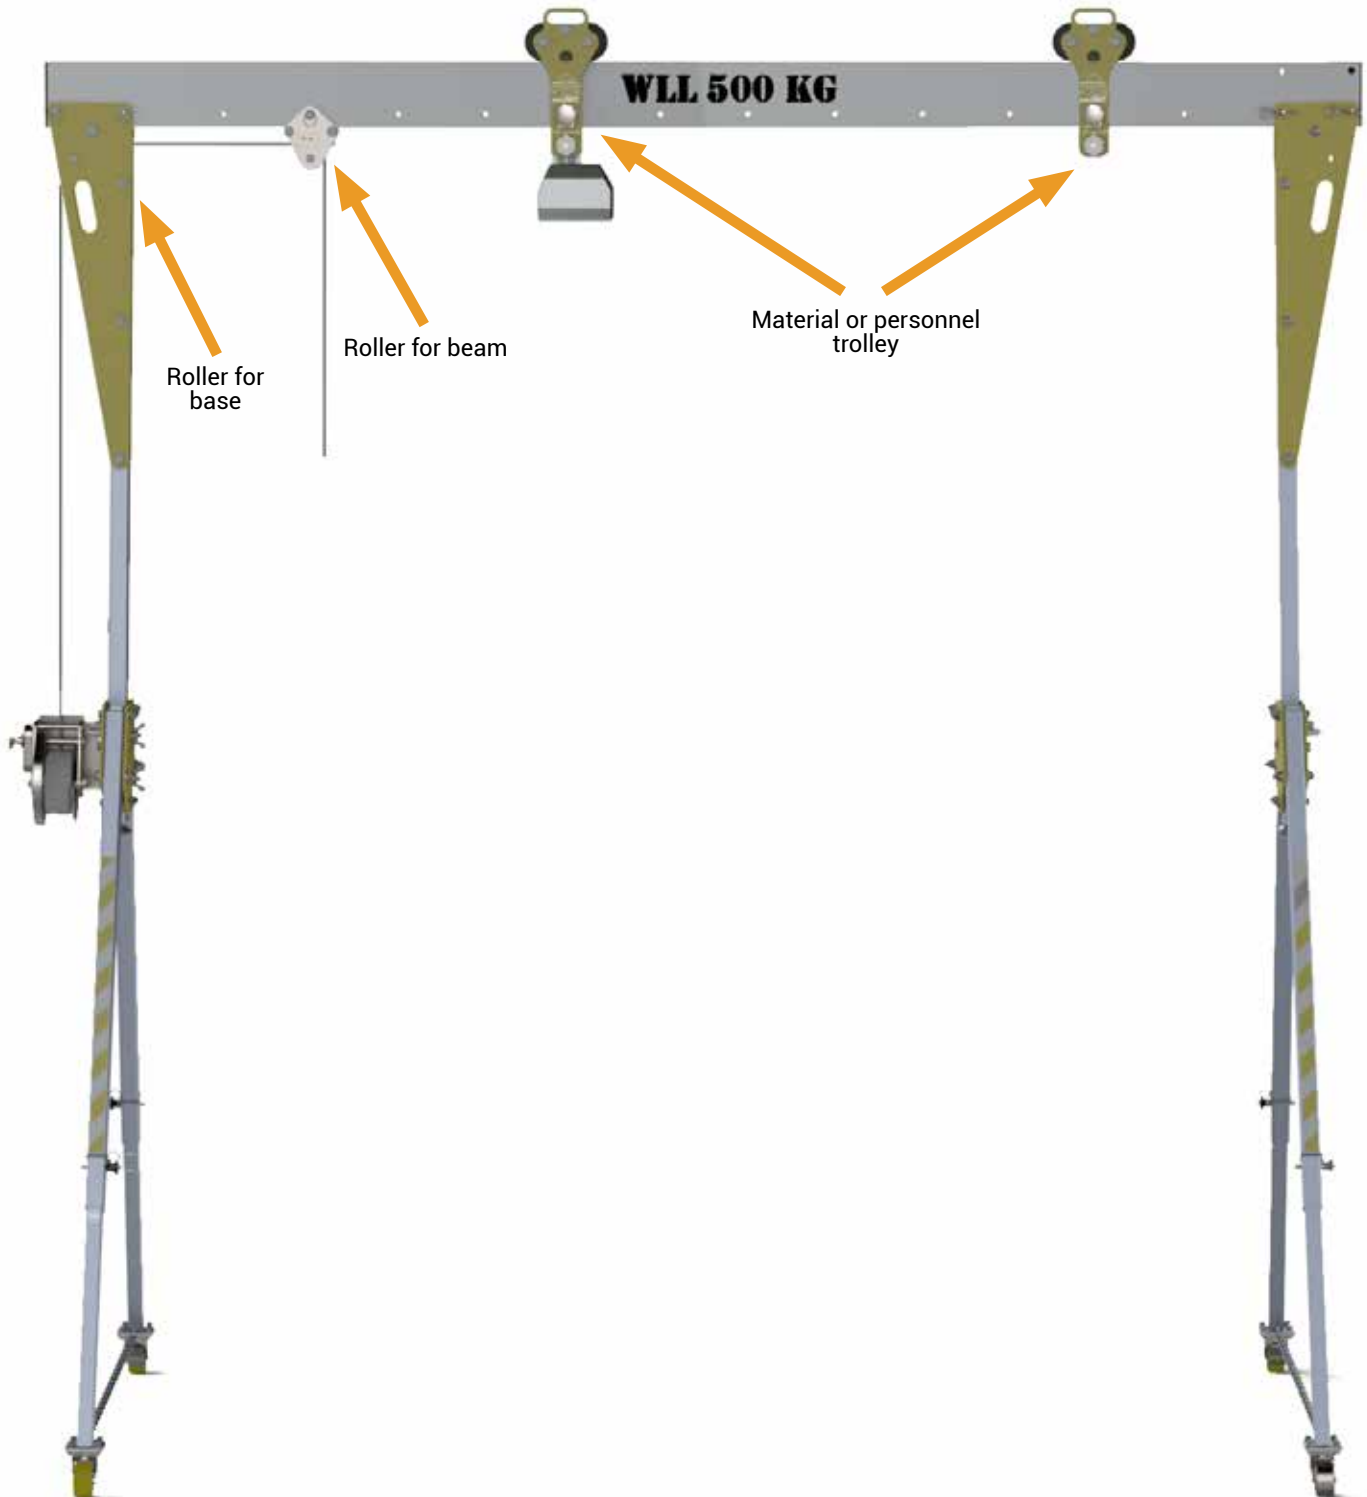





1.



2.



3.



COMPACT
GANTRY
CRANE

KSB-LE



UP TO
500kg

EN 13001
EN 15011



FALL PROTECTION
FOR 2 USERS

EN 795/B:2012
CEN/TS 16415/B:2013




HEIGHT:

BEAM LENGTH:

1,9m to 3m


2m to 6m

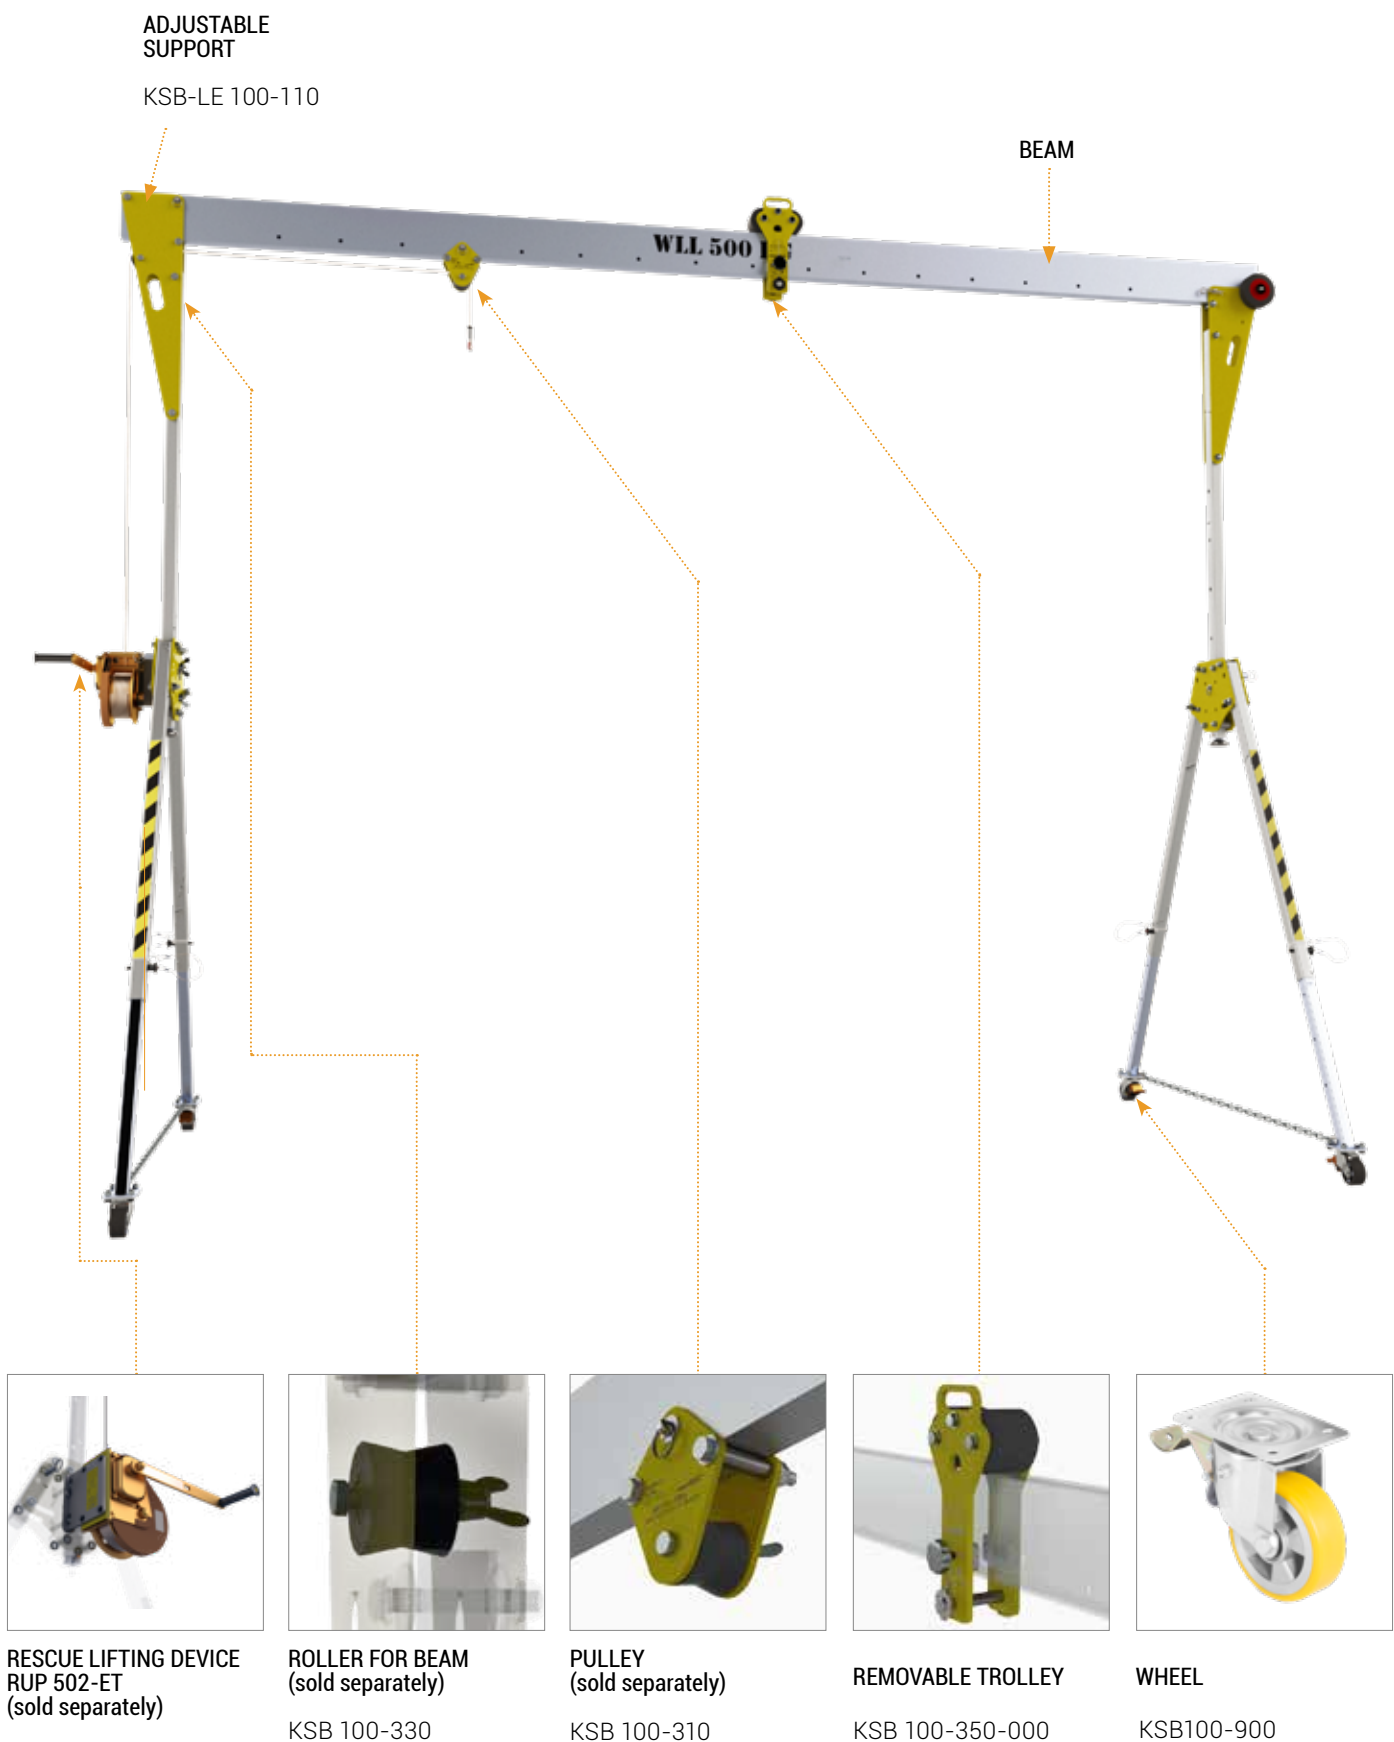

DUE TO EUROPEAN PATENT RESTRICTIONS, THE PRODUCT IS NOT AVAILABLE IN THE FOLLOWING COUNTRIES:

Albania, Switzerland, Cyprus, Germany, France, Great Britain, Hungary, Ireland, Liechtenstein, Luxembourg, Monaco, Macedonia, Malta, The Netherlands, San Marino, Turkey.

technical data

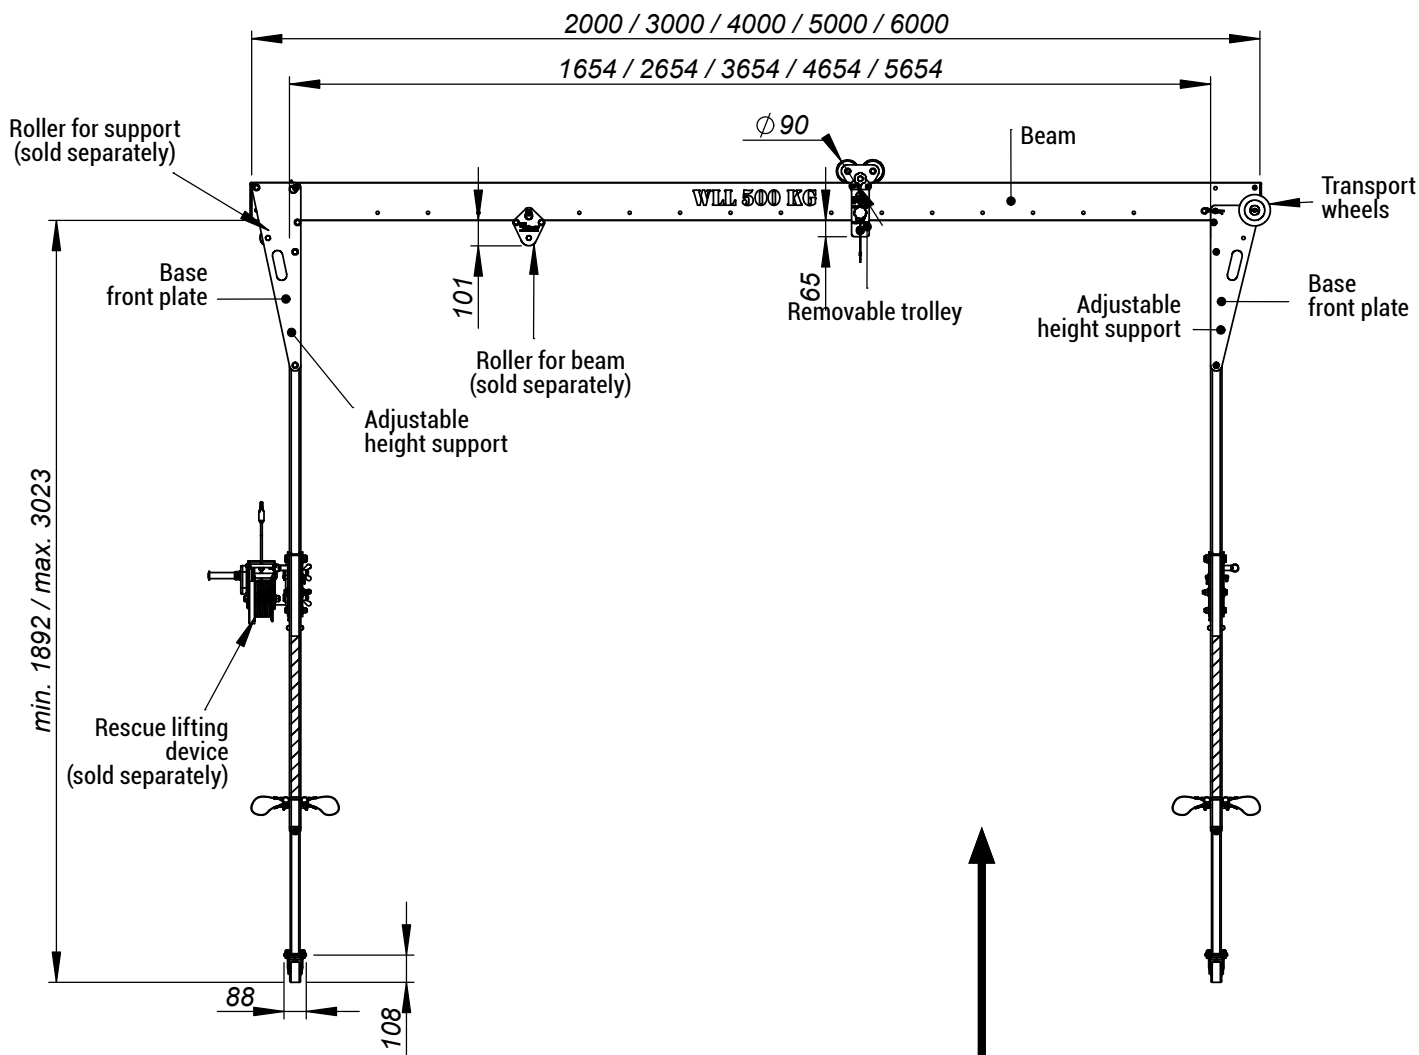

Compact gantry KSB-LE comprises beam and two fixed supports. Thus transport of the device is facilitated and no additional tools are required for its deployment

1. Beams


ref. no. KSB200-001 - 2-meter beam
 ref. no. KSB300-001 - 3-meter beam
 ref. no. KSB400-001 - 4-meter beam
 ref. no. KSB500-001 - 5-meter beam
 ref. no. KSB600-001 - 6-meter beam

2. Supports

Height: 2.1 - 3.0 mm, permanently fixed to beam. The support is fitted with a kit of swivel wheel with brake, dia. 80mm.

3. Trolley

ref. no. KSB100-350-000
 Made of aluminium alloy, stainless steel and polyamide parts. Trolley can be locked using knob by positioning on the beam.

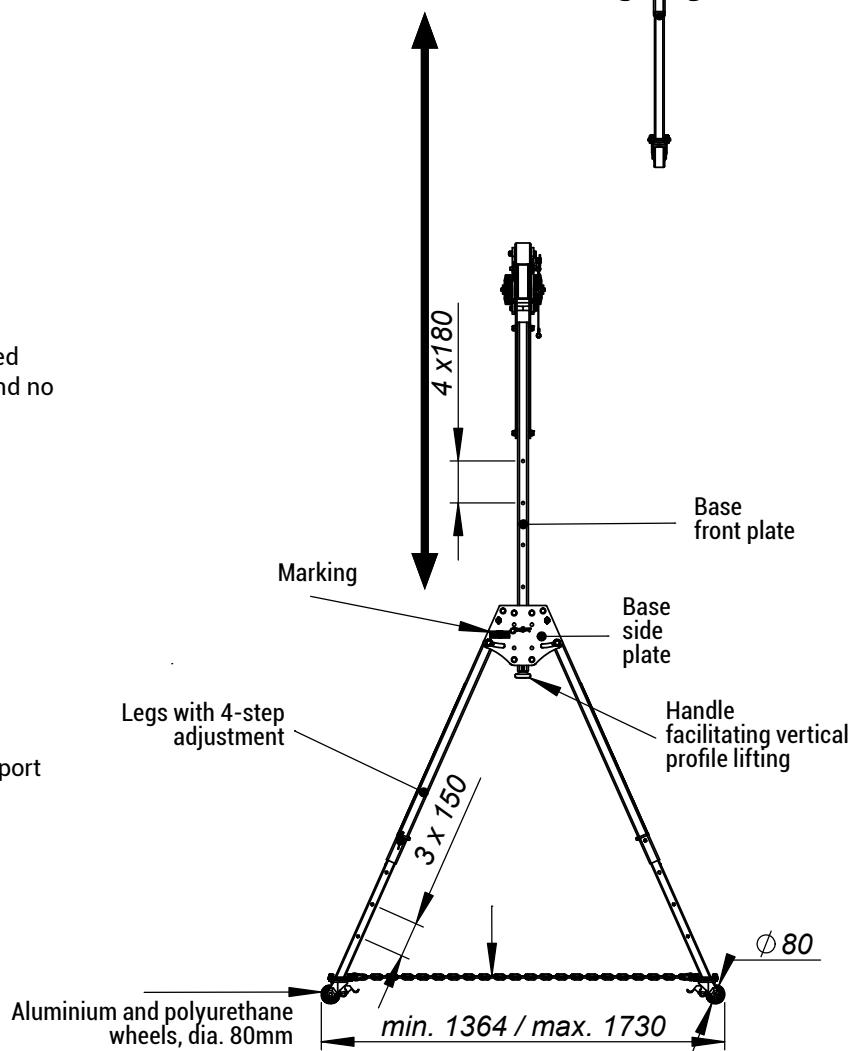



unfolding


- 1 Folded gantry KSB - LE.
Deploy bases.




- 2 Move base legs apart.



- 3 Place gantry legs by locking with pin.

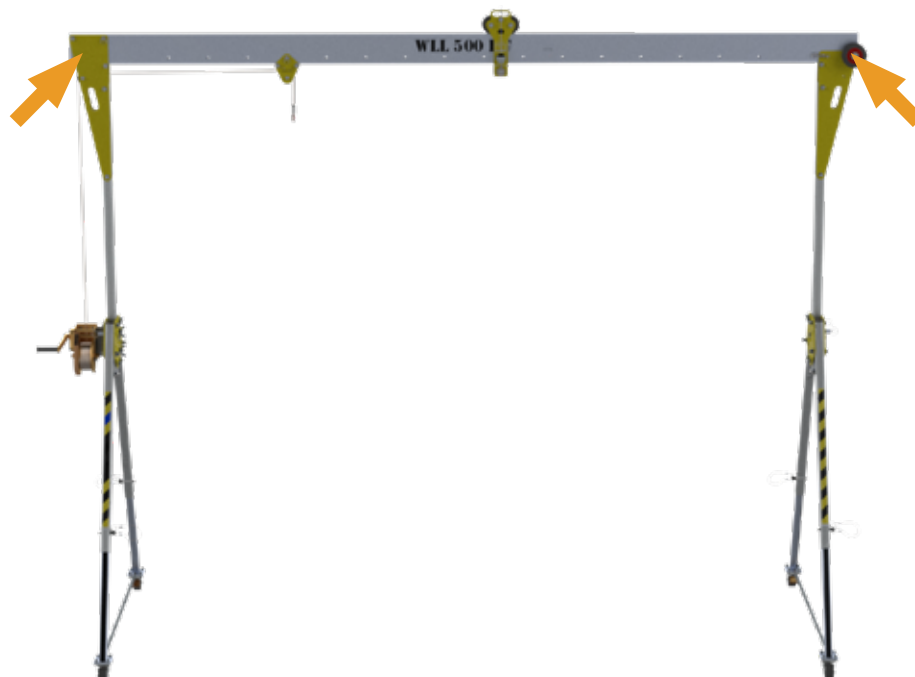


4 Install accessories.

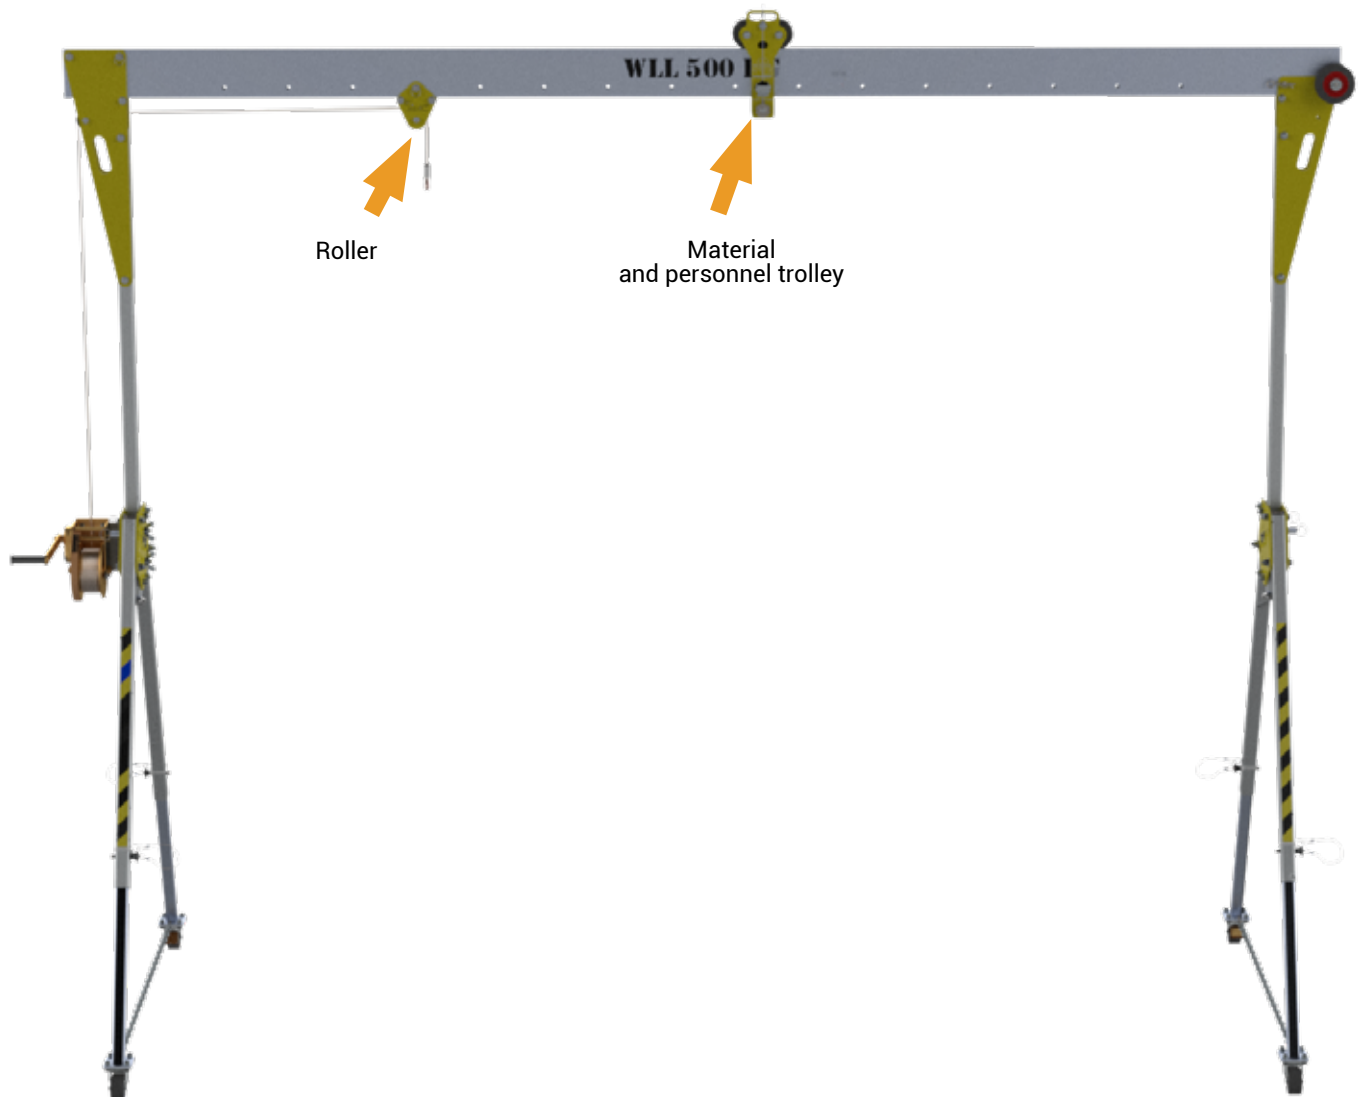

transport

Transport dimensions.

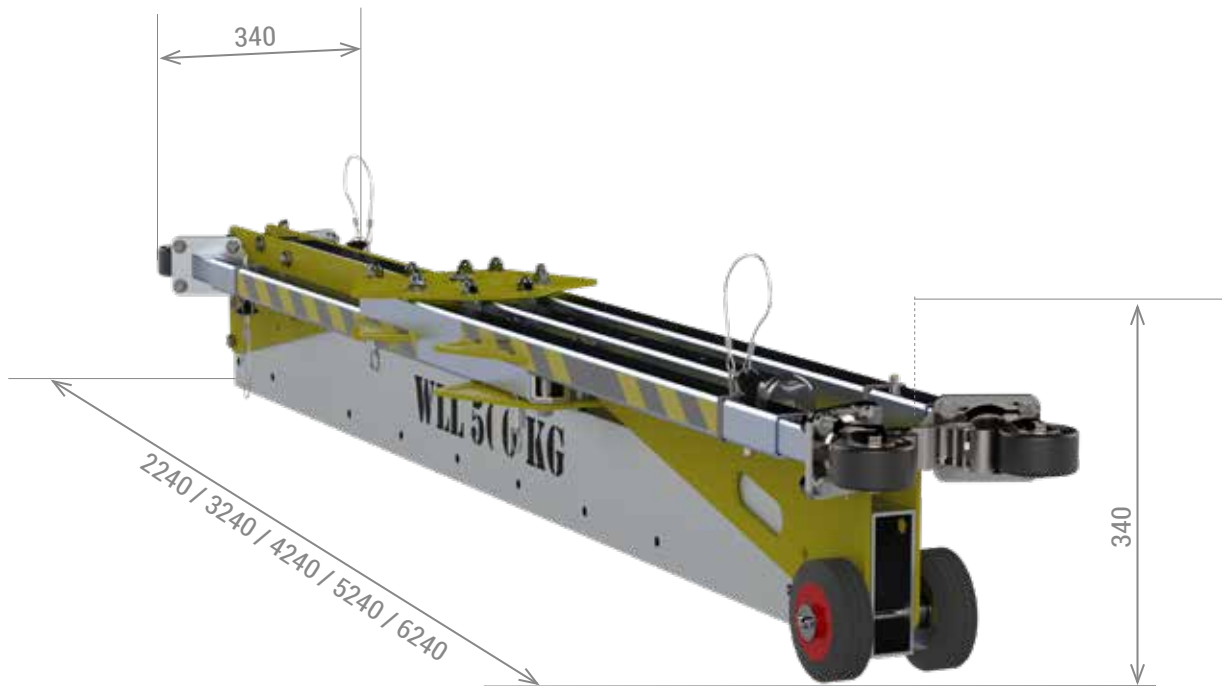

Gantry KSB-LE ready for transport.





KSB - LE



COMPACT
FOLDING
GANTRY
CRANE

FSB



UP TO
500kg

EN 13001
EN 15011



FALL PROTECTION
FOR 2 USERS

EN 795/B:2012
CEN/TS 16415/B:2013



HEIGHT:
BEAM LENGTH:

1,9m to 3,1m
2m to 6m



TRANSPORT WHEEL

FSB 100-902



CONNECTOR
SUPPORT-FSB BEAM

FSB 100-200



PULLEY (sold separately)

KSB 100-310



REMOVABLE TROLLEY

KSB 100-350-000




TRANSPORT ROLLERS FOR
FSB BEAM

KSB 100-250

DUE TO EUROPEAN PATENT RESTRICTIONS, THE PRODUCT IS NOT AVAILABLE IN THE FOLLOWING COUNTRIES:
Albania, Switzerland, Cyprus, Germany, France, Great Britain, Hungary, Ireland, Liechtenstein, Luxembourg, Monaco, Macedonia, Malta, The Netherlands, San Marino, Turkey.

technical data

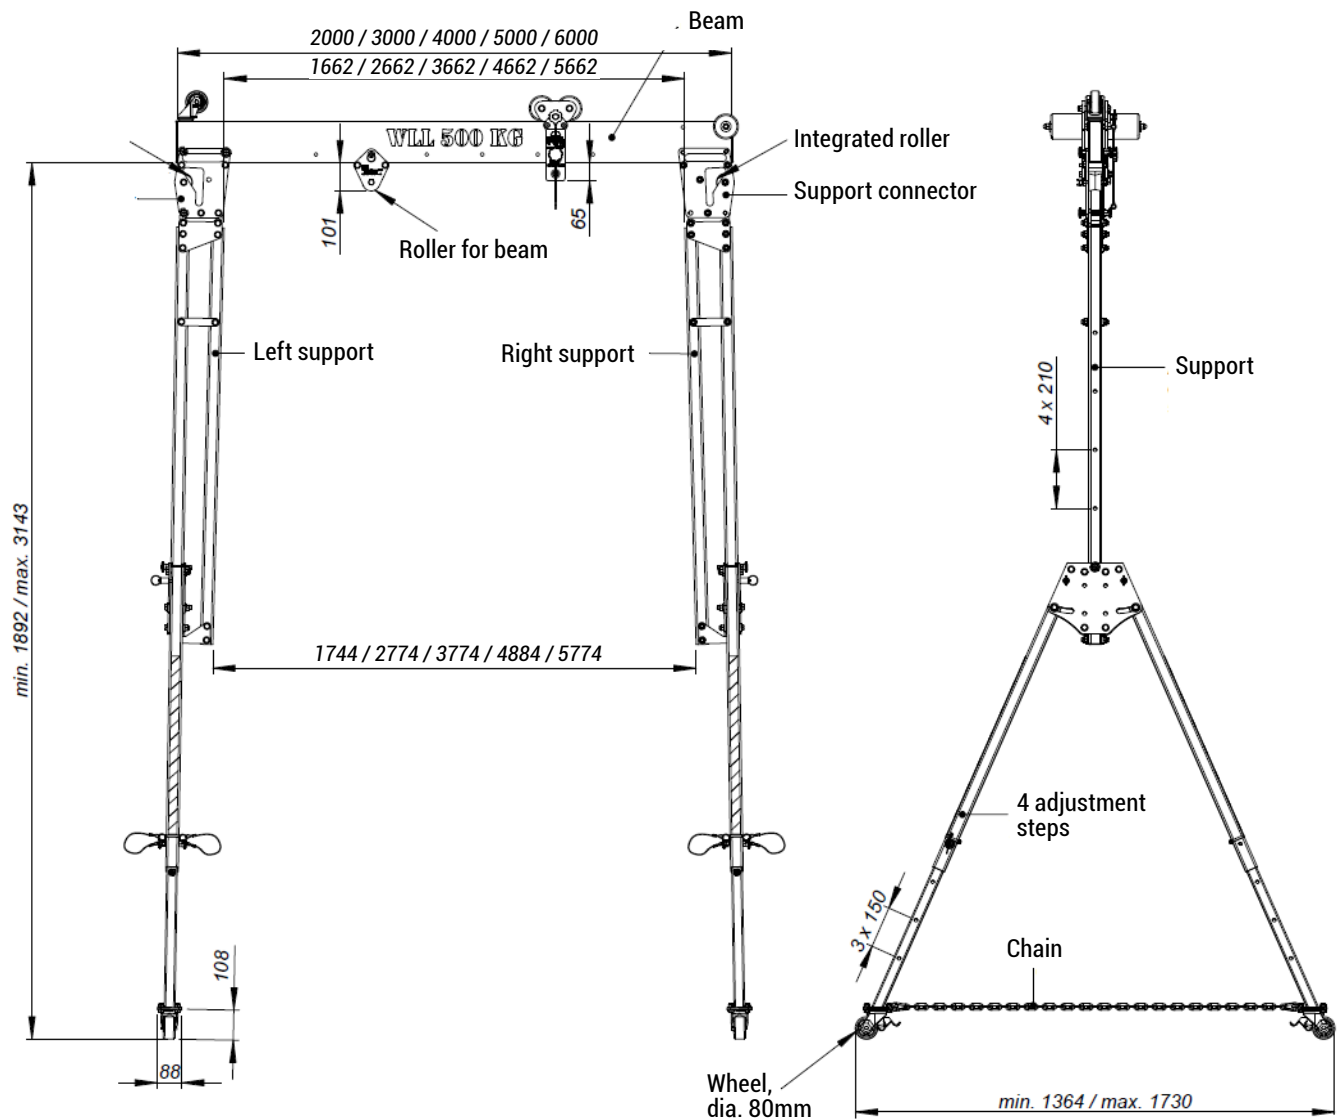

Gantry FSB comprises beam, two detachable connectors, two removable supports, and trolley

ref. no. FSB200-K1-W3 - 2-meter beam

ref. no. FSB300-K1-W3 - 3-meter beam

ref. no. FSB400-K1-W3 - 4-meter beam

O1 - one support type available (dimensions: 1.9 - 3.1 m)

with set of swivel wheels (KSB100-900) available with brake, dia. 80mm

TROLLEY ref. no. KSB100-350-000

Made of aluminium alloy, stainless steel and polyamide parts.

Trolley can be locked using knob by positioning on the beam.



FSB100-902

SWIVEL WHEEL
80MM FOR FSB
BEAM - KIT



KSB100-310

LINE GUIDE
ROLLERS
(SOLD SEPARATELY)




KSB 100-350-000

OUTER REMOVABLE
TROLLEY




FSB 100-250

TRANSPORT
ROLLERS FOR
FSB BEAM

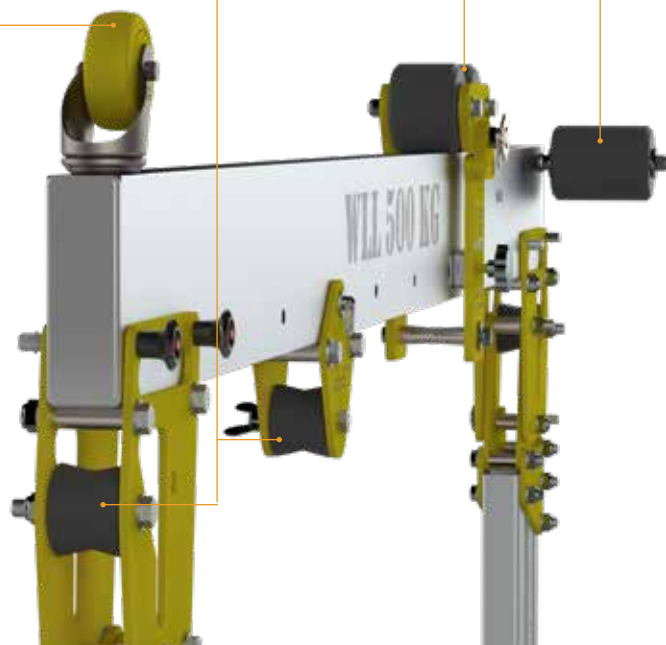

supports



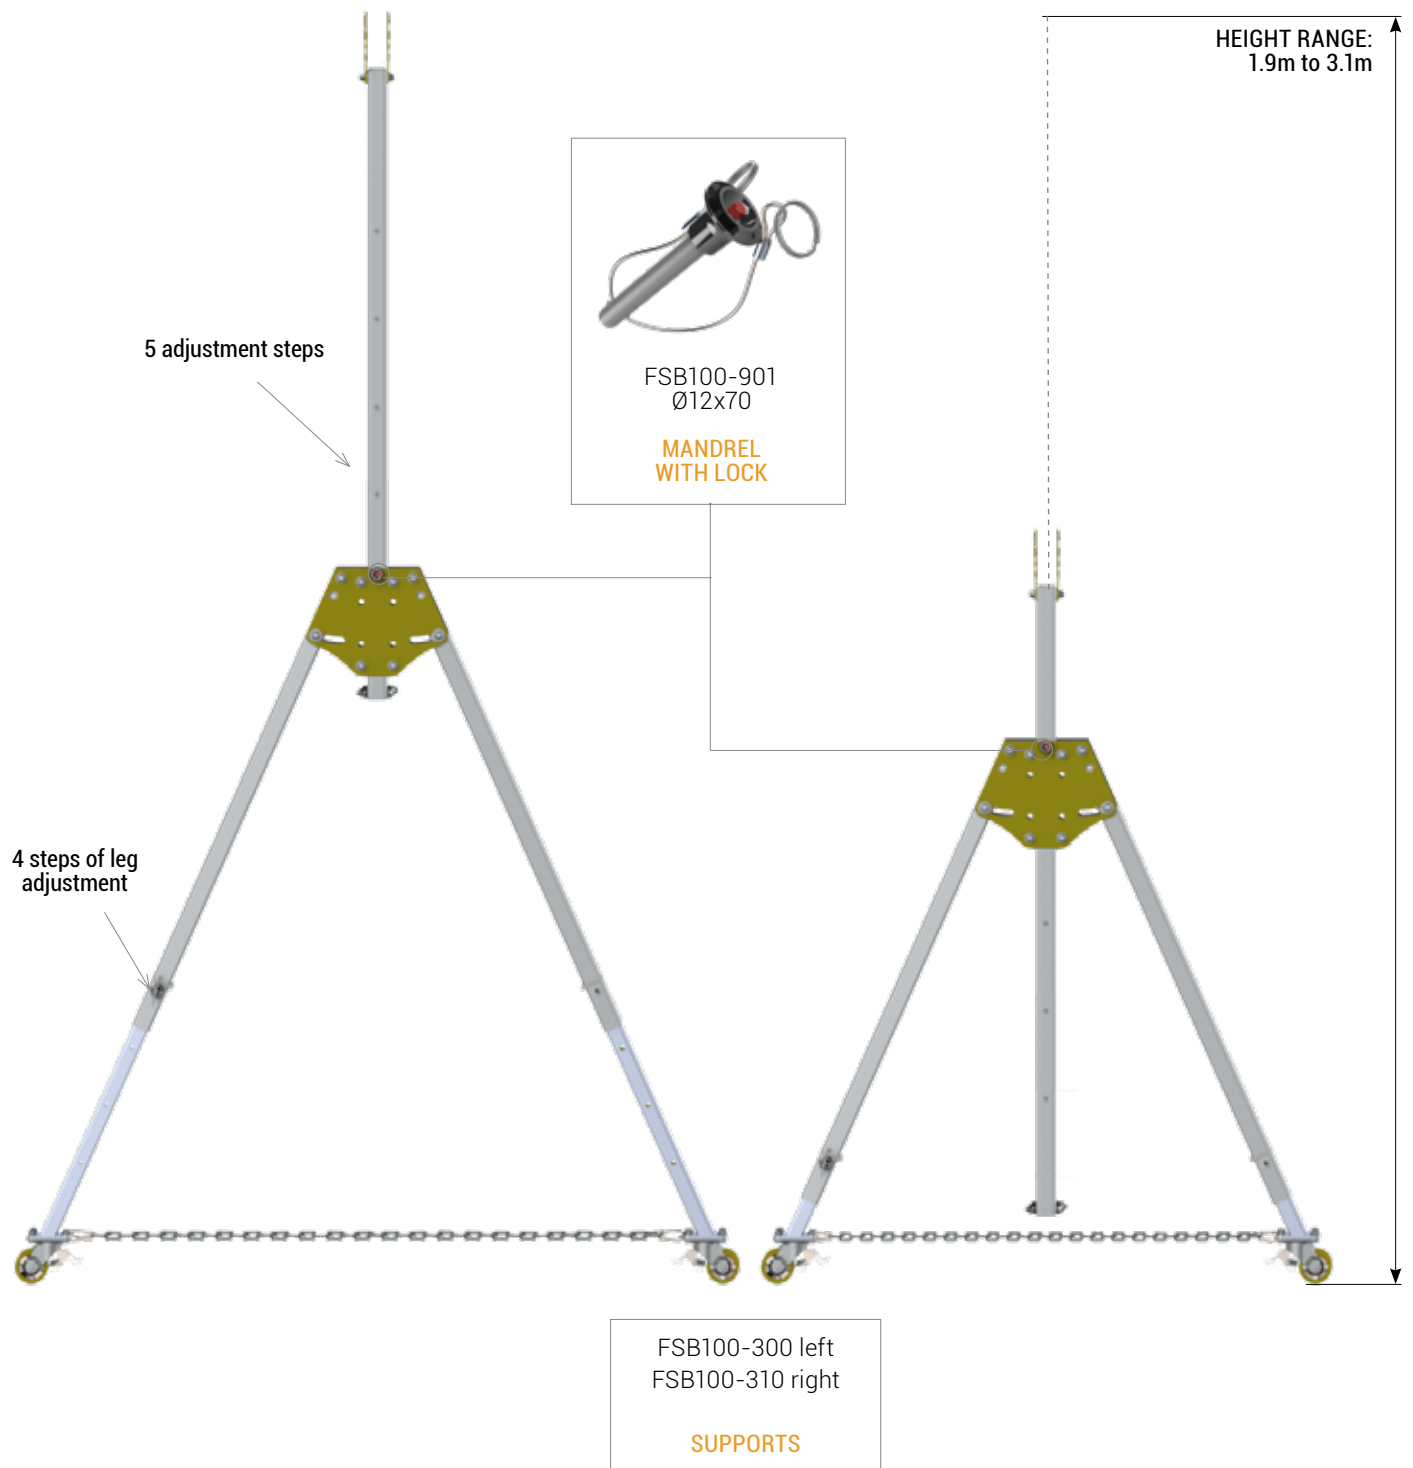

DUE TO EUROPEAN PATENT RESTRICTIONS, THE PRODUCT IS NOT AVAILABLE IN THE FOLLOWING COUNTRIES:

The Netherlands, France, Germany, Great Britain, Italy.

unfolding

1

Folded gantry FSB.
Unfold support.



2

Unfold supports and
move legs apart.




3

Set the gantry
at a desired height.




4

Install additional accessories.

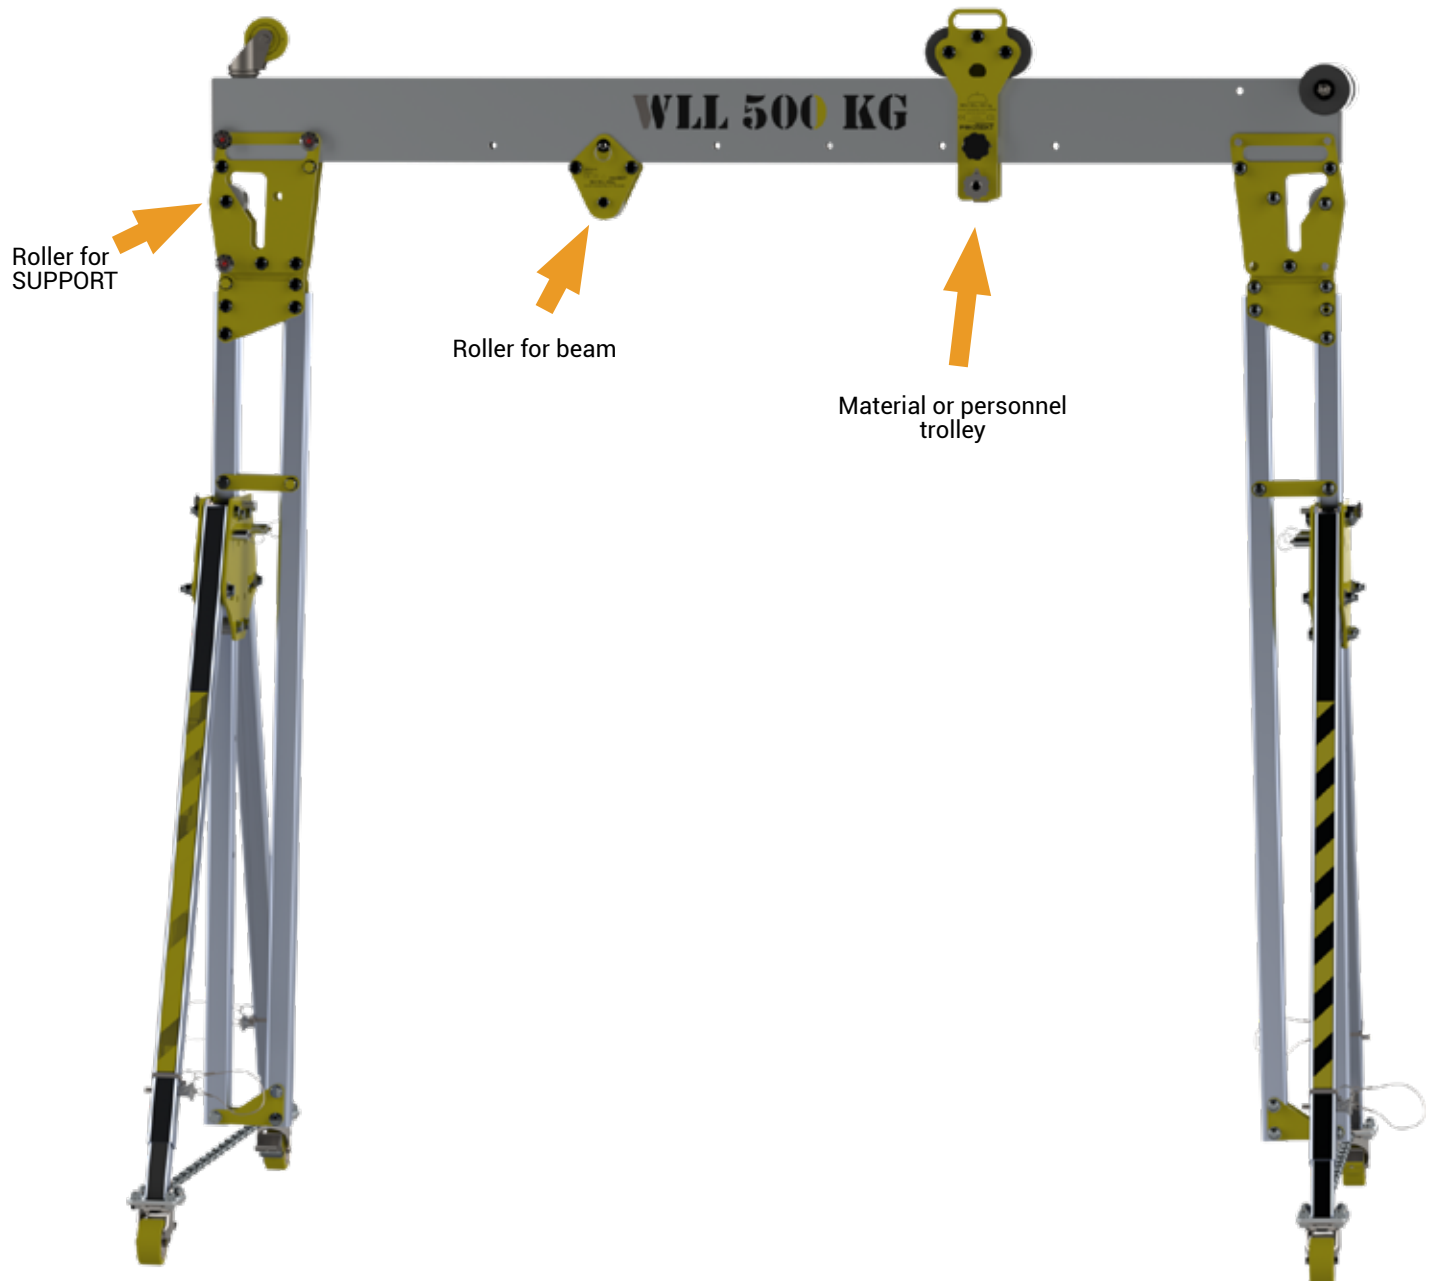

transport

Transport dimensions.

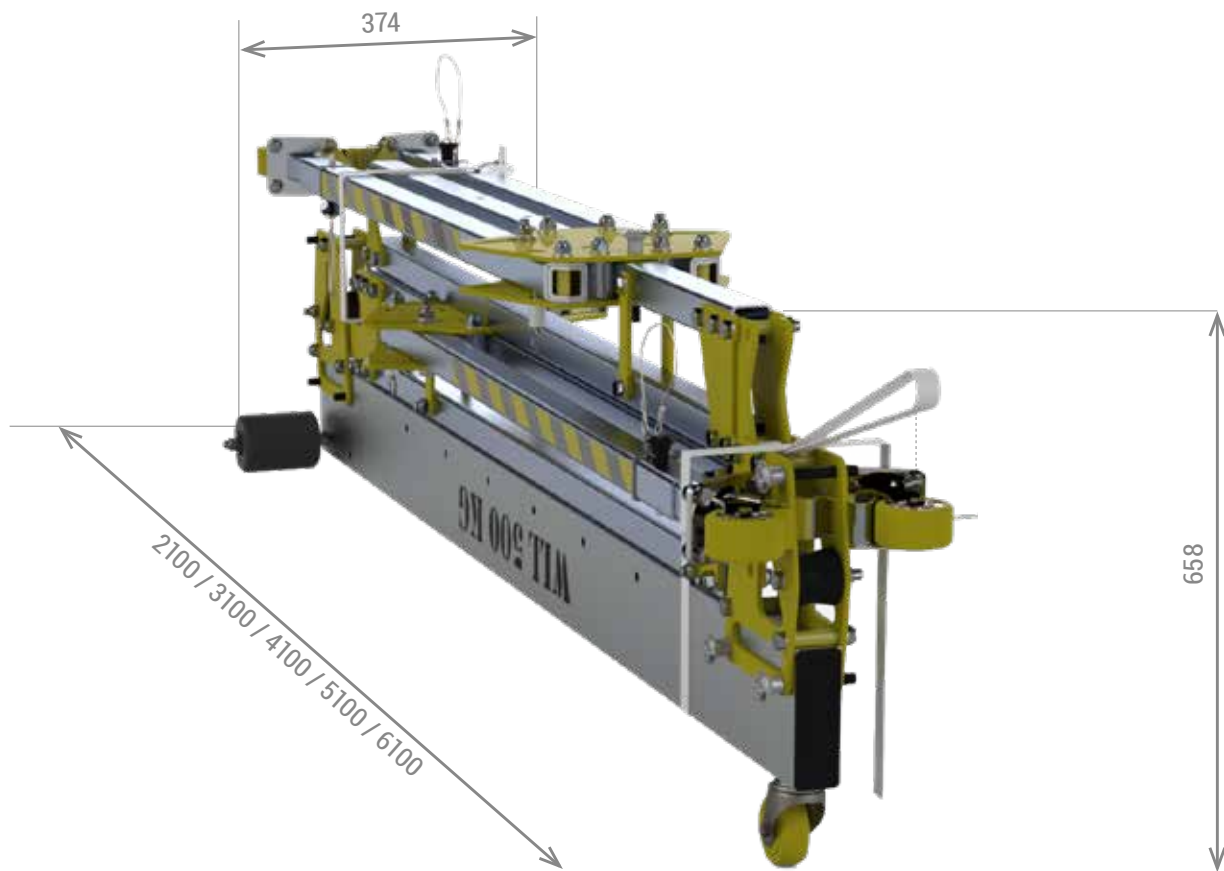

Gantry FSB ready for transport.





KSB & FSB – Compact gantries



1.



2.








3.

FSB – Gantry unfolding sequence

beams for compact gantries KSB / KSB- LE / FSB



Parameters of available beams:

		Weight	Length	WLL
KSB200-001		8,25 kg	2 m	0,5 T
KSB300-001		12,39 kg	3 m	0,5 T
KSB400-001		16,52 kg	4 m	0,5 T
KSB500-001		66,5 kg	5 m	0,3 T
KSB600-001		80,1 kg	6 m	0,3 T

beams for compact gantries - additional accessories

Kit KSB-100-800


KSB100-350-000



KSB100-310
ROLLER FOR BEAM



KSB100-330
ROLLER FOR SUPPORT

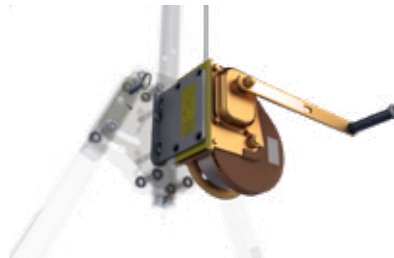

RESCUE LIFTING DEVICE 25M
FIXED ON SUPPORT SIDE
PLATEN




OVERHEAD MATERIAL
AND PERSONNEL
TROLLEY

Rescue lifting device 25m + set of line guide rollers.

Installing roller on beam.

1.



Remove cotter bolt.

2.



Mount pulley on
beam by locking
with pin.

3.



Lock the installed
pulley using cotter
bolt.


Installing trolley on beam.

1.




Unscrew protection device
and remove trolley axis.

2.



Install trolley on
beam.

3.



Insert trolley axis and screw
protection.

modules of compact gantries KSB / KSB- LE / FSB



KSB100-350-000

Material or personnel trolley (overhead).



Made of durable aluminium alloy, stainless steel and polyamide. The trolley can be locked in any position along the beam by knob. It can be used for load handling or for personnel evacuation.




KSB100-310

Roller for support and roller for beam.




KSB100-330

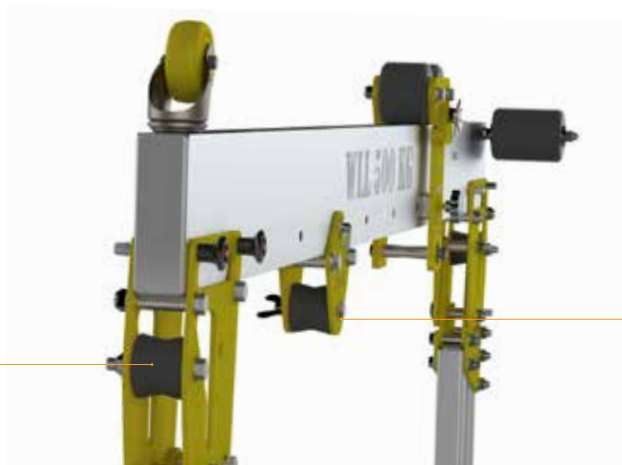

KSB100-310

Roller for support is made of polyamide and galvanized steel. It provides work line guidance when using RUP50x-T series rescue lifting devices. The roller is installed using bolt with wing nut between two upper support plates. Roller for beam is made of strengthened aluminium alloy, stainless steel and polyamide. It provides work line guidance when using RUP50x-T series rescue lifting devices. The roller is installed on beam using pin with cotter bolt.



FSB100-210

Support connector.



Connecting element between support and beam for compact gantry FSB made of galvanized steel.

modules of compact gantries KSB / KSB- LE / FSB



FSB100-250

Transport roller.



Roller used for transport, fixed on main beam of gantry FSB.



FSB100-160

Needed for RUP502 - ET winch



Made of two aluminium, powder-painted plates, polyamide roller with ball-bearings, stainless steel bushing and galvanized steel connectors. Provides working rope guidance when RUP502-ET brake winch is used.



FSB100-902

Transport wheel.




Swivel wheel dia. 80mm fixed on main beam of gantry FSB.



**FSB100-901 - support-beam
AT011-911 - leg**

Automatic mandrel.
Ø12 x 70 - support-beam
Ø10 x 50 - leg

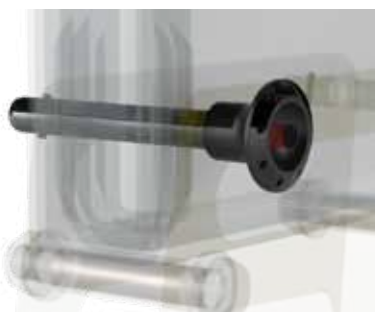

Automatic mandrels are used for connecting each individual gantry elements together.

STANDARD GANTRIES

38 STANDARD GANTRIES

39 ASB

48 LSB

55 Modules of Standard Gentries

61 HSB

67 Modules of HSB

68 BAS

75 Modules of BAS



STANDARD GENTRY ASB KIT

Each standard compact gantry kit comprises:

1. 2 supports equipped with swivel wheels with brake,
2. beam of a required length
3. removable trolley.



1.



2.



3.



ALUMINIUM
GANTRY
CRANE

ASB



1500kg to
3500kg
EN 13001
EN 15011




FALL PROTECTION
FOR 5 USERS
EN 795/B:2012
CEN/TS 16415/B:2013



HEIGHT: 1,6m to 6,4m
BEAM LENGTH: 2m to 7m

overview



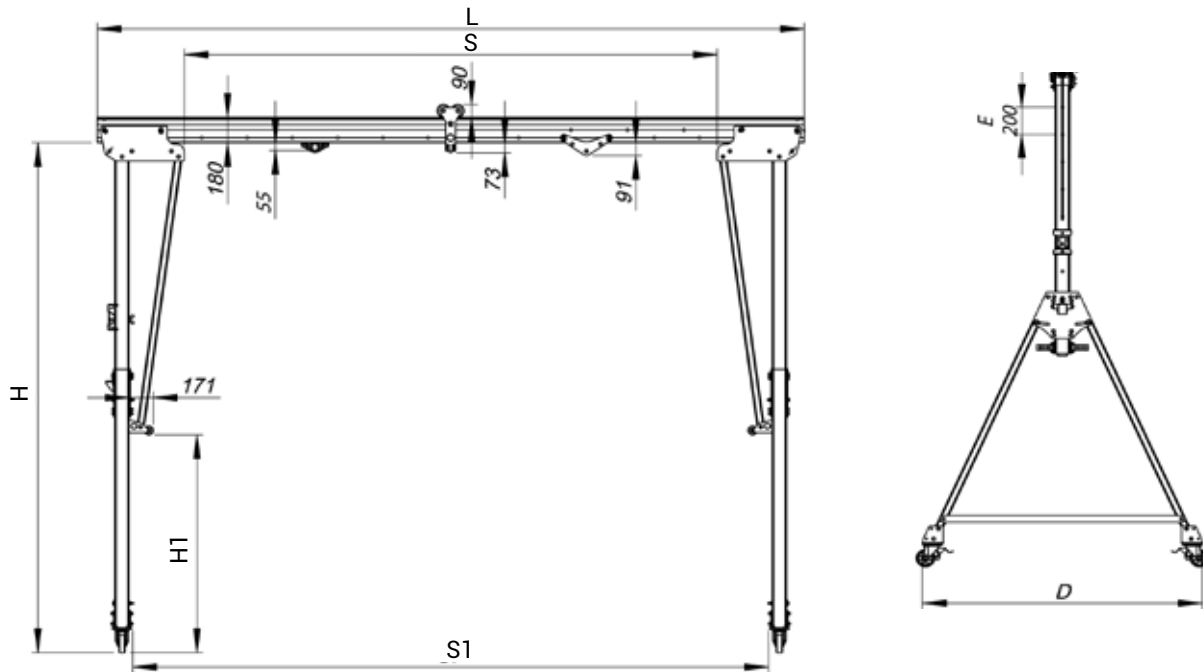

"L" BEAM LENGTH [mm]	Beam weight [kg]	"S" Beam work- ing range [mm]	"S1" Support working range [mm]	A1 SUPPORT		B1 SUPPORT		C1 SUPPORT		C2 SUPPORT	
				WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]
2000	26,7	770	1496	3*	122	3	148	3	204	1	242
3000	40,1	1770	2496	3*	135	3	161	3	218	1	255
4000	53,4	2770	3496	3	148	3	174	3	231	1	269
5000	66,5	3770	4496	2,5	162	2,5	188	2,5	244	1	282
6000	80,1	4770	5496	2	175	2	201	2	258	1	295
7000	93,5	5770	6496	1,5	188	1,5	214	1,5	271	1	309
Support weight [kg]				38,2		50,2		72,8		98,4	
"H" - Working height (min... max) [mm]				1594...2194		2207...3607		3230...5430		4230-6430	
"H1" - Height under roller (min... max) [mm]				34...634		141...1541		164...2364		164...2364	
"D" - Leg spacing [mm]				1115		1928		2834		2834	
"E" - Working height adjustment [mm]				200		200		200		200	

* On a special request, 2 and 3 m long beams with a capacity (WLL) of 3500kg can be manufactured for use with A1 supports.

ASB REFERENCE NUMBER

ASBXXX-YY-ZZ
WHERE:

ASBXXX-YY-ZZ
 YY - type of supports
 [A1 / B1 / C1 / C2]
 ZZ - type of wheels in supports
 [W1 / W2 / W3 / W4 / W5 / W6]
 XXX - beam length [cm]
 [200 / 300 / 400 / 500 / 600 / 700]

EXAMPLE: ASB500-B1-W2 - 5-meter long beam with supports B1 equipped with wheels W2 (200mm, with hard treaded rubber).

beams - additional equipment



Parameters of available beams:

Weight Length WLL*

ASB200-001		26,7 kg	2 m	3 T
ASB300-001		40,1 kg	3 m	3 T
ASB400-001		53,4 kg	4 m	3 T
ASB500-001		66,5 kg	5 m	2,5 T
ASB600-001		80,1 kg	6 m	2 T
ASB700-001		93,5 kg	7 m	1,5 T

* for kit configuration with support C2 the acceptable WLL is 1T for all beam lengths



ASB500-250

**INNER TROLLEY
(PERSONNEL)**



ASB 500-200

**OUTER TROLLEY
(MATERIAL)**



ASB500-240 ASB500-180

**ROLLER FOR BEAM
AND ROLLER FOR SUPPORT**




ASB500-360


**SUPPORT
LIFTING EYE**



ASB500-560

**PIN WITH
COTTER BOLT
17,5 mm**

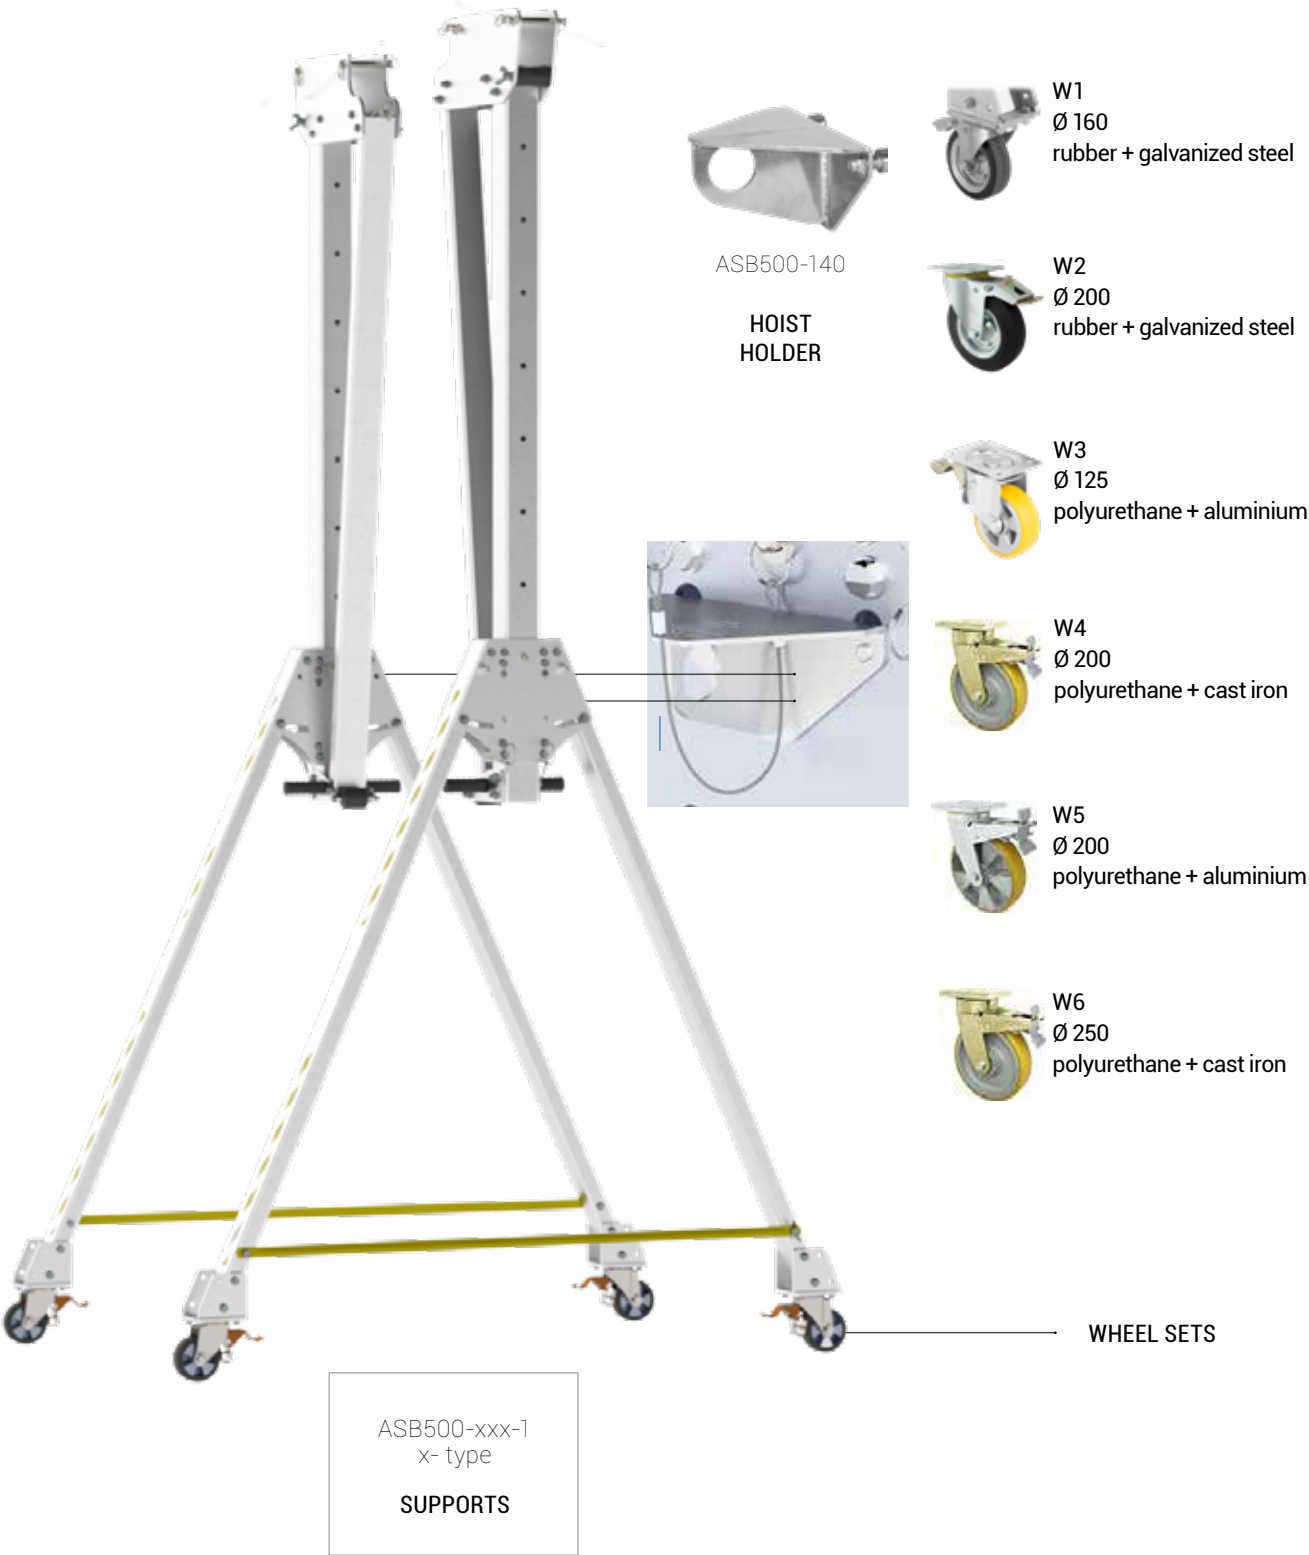

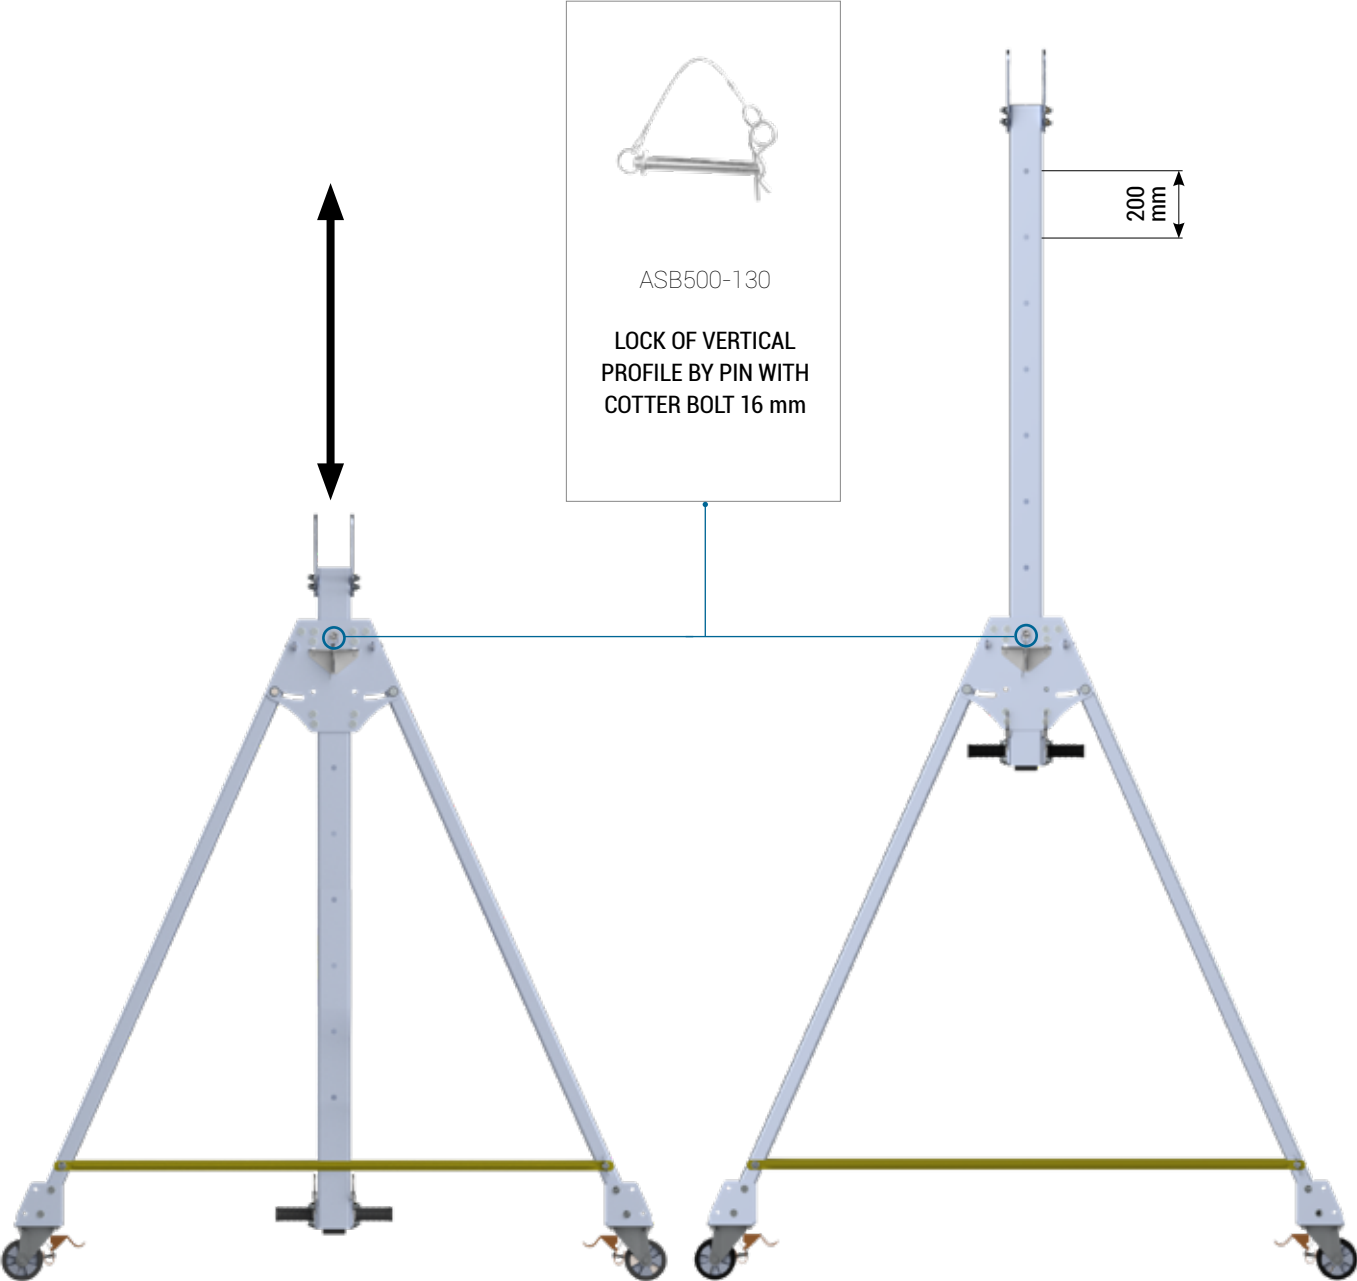

Ref. no.	Part name	Height under beam	Weight of set	WLL
ASB500-450-1	Set of supports A1	1,59-2,19 m	76,4 kg	3 T
ASB500-100-1	Set of supports B1	2,20-3,60 m	100,4 kg	3 T
ASB500-500-1	Set of supports C1	3,23-5,43 m	145,6 kg	3 T
ASB500-500-2	Set of supports C2	4,23-6,43 m	196,8 kg	1 T

C

B

A



"A" SERIES - LOW

A1: height under beam: 1.6 - 2.2 m

"B" SERIES - MEDIUM

B1: height under beam: 2.2 - 3.6 m

"C" SERIES - HIGH

"C1" Height under beam: 3.2 - 5.4 m

"C2" Height under beam: 4.2 - 6.4 m



Basic variant developed for use with lifting devices attached to material trolley.



Extended version with rescue lifting device mounted on support vertical profile.



Variant with rescue lifting device mounted on support side platen.



LIGHT
GANTRY
CRANE

LSB



500kg
to 2000kg
EN 13001
EN 15011



FALL PROTECTION
FOR 3 USERS
EN 795/B:2012
CEN/TS 16415/B:2013



HEIGHT: 1,6m to 6,4m
BEAM LENGTH: 2m to 7m



**SUPPORT
LIFTING EYE**
ASB500-360



**HOIST
HOLDER**
ASB500-140



**ROLLERS FOR
SUPPORT AND FOR
BEAM**

ASB500-180
ASB500-240



**INNER PERSONNEL
TROLLEY**

ASB500-250



**OUTER MATERIAL
TROLLEY**

ASB500-200



SUPPORTS

LSB500-xxx-1
xxx- type



W1- standard



W2

W3




W4

W5

W6

WHEELS IN 6 TYPES

technical data table

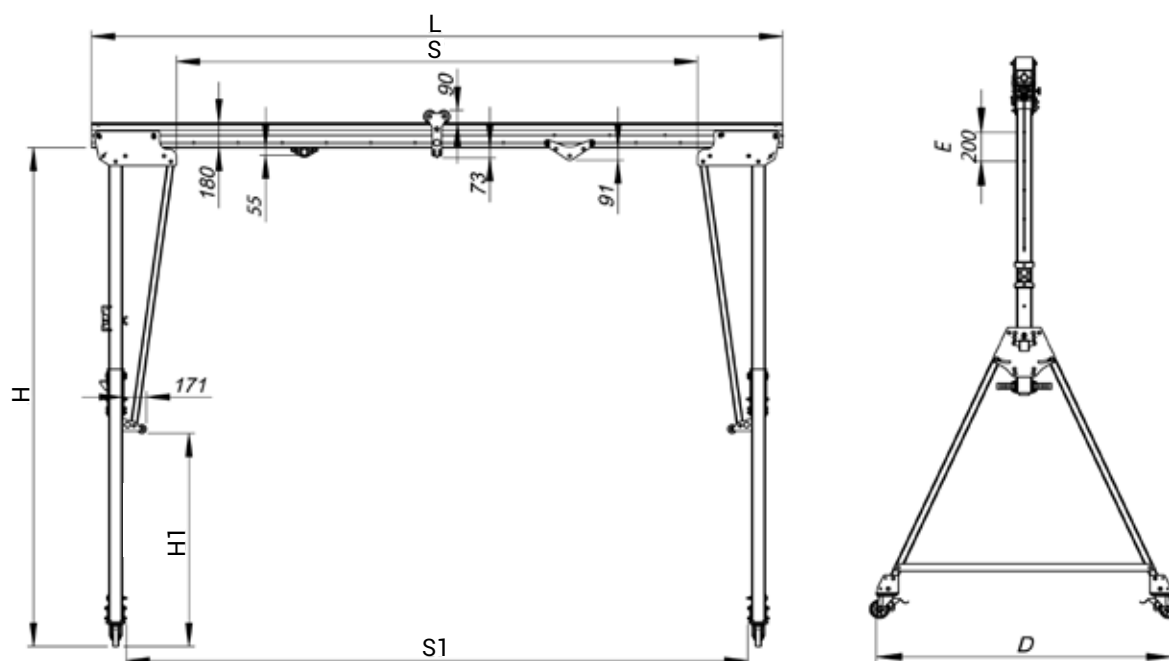

"L" Beam length [mm]	Beam weight [kg]	"S" Beam working range [mm]	"S1" Support working range [mm]	E1 SUPPORT		F1 SUPPORT		G1 SUPPORT		G2 SUPPORT	
				WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]
2000	13,2	1496	770	2	122	1,75	148	1,75	204	0,5	242
3000	19,7	2496	1770	1,5	135	1,5	161	1,5	218	0,5	255
4000	26,3	3496	2770	1,25	148	1,25	174	1,25	231	0,5	269
5000	32,8	4496	3770	1	162	1	188	1	244	0,5	282
6000	39,4	5496	4770	0,75	175	0,75	201	0,75	258	0,5	295
7000	46	6496	5770	0,5	188	0,5	214	0,5	271	0,5	309
Support weight [kg]				34		45		62		68,8	
"H" - Working height (min... max) [mm]				1594...2194		2207...3607		3230...5430		4230...6430	
"H1" - Height under roller (min... max) [mm]				34...634		141...1541		164...2364		164...2364	
"D" - Leg spacing [mm]				1115		1928		2834		2834	
"E" - Working height adjustment [mm]				200		200		200		200	

LSB REFERENCE NUMBER

LSBXXX-YY-ZZ
WHERE:

LSBXXX-YY-ZZ
 YY - type of supports
 [E1 / F1 / G1 / G2]
 ZZ - type of wheels in supports
 [W1 / W2 / W3 / W4 / W5 / W6]
 XXX - beam length [cm]
 [200 / 300 / 400 / 500 / 600 / 700]

EXAMPLE: LSB500-F1-W2 - 5-meter long beam with supports F1 equipped with wheels W2 (200mm, with hard treaded rubber).



OUTER TROLLEY
(MATERIAL)

ASB 500-200









SUPPORT
LIFTING EYE

ASB500-360

Parameters of available beams:

Weight Length WLL**

LSB200-001		13,2 kg	2 m	1,75 T***
LSB300-001		19,7kg	3 m	1,5 T
LSB400-001		26,3 kg	4 m	1,25 T
LSB500-001		32,8 kg	5 m	1 T
LSB600-001		39,4 kg	6 m	0,75 T
LSB700-001		46,0kg	7 m	0,5 T

** for kit configuration with support G2 the acceptable WLL is 0,5T for all beam lengths

*** on special request up to 2T



ASB500-250
INNER
PERSONNEL
TROLLEY



ASB 500-200
OUTER MATERIAL
TROLLEY



ASB500-240 ASB500-180
ROLLER FOR BEAM
AND ROLLER FOR SUPPORT



ASB500-360
SUPPORT LIFTING EYE




ASB500-130
PIN WITH
COTTER BOLT 17.5mm



	W1 Ø 160 rubber + galvanized steel
	W2 Ø 200 rubber + galvanized steel
	W3 Ø 125 poliuretan + aluminium
	W4 Ø 200 polyurethane + aluminium
	W5 Ø 200 polyurethane + cast iron
	W6 Ø 250 polyurethane + cast iron

WHEEL SETS

supports - height adjustment

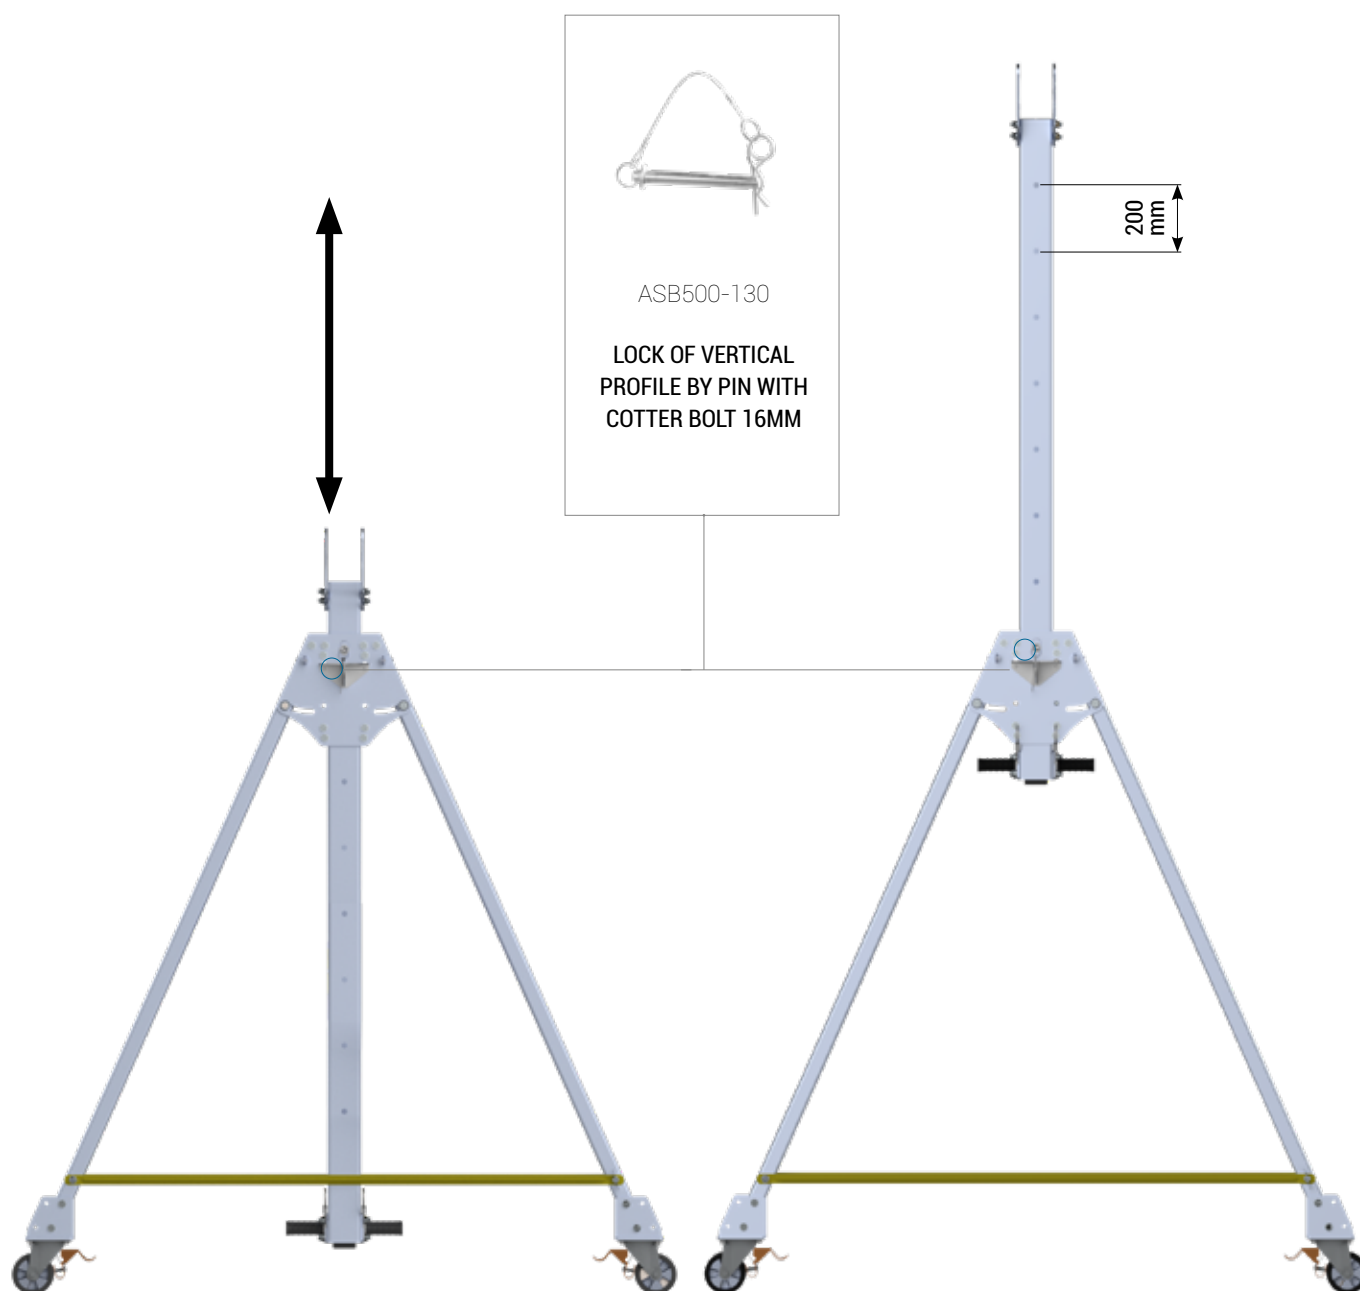

Ref. no.	Part name	Height under beam	Weight of set	WLL
LSB500-450-1	Set of supports E1	1,59-2,19 m	68 kg	2 T
LSB500-100-1	Set of supports F1	2,20-3,60 m	90 kg	1,75 T
LSB500-500-1	Set of supports G1	3,23-5,43 m	124 kg	1,75 T
LSB500-500-2	Set of supports G2	4,23-6,43 m	137,6 kg	0,5 T




ASB500-200

Outer material trolley



Made of durable aluminium alloy, stainless steel and polyamide. The trolley can be locked in any position along the beam by knob. Outer trolley is intended for load handling only.



ASB500-250

Inner personnel trolley.



Made of galvanized steel and stainless steel. Space savings - lifting eye is only 55mm under the beam. Position locking using pins with cotter bolts. Inner trolley is designed for personnel protection only. One trolley can be used maximum for one person, certified as an anchor point compliant with EN 795.



ASB500-130

Pin with cotter bolt 16mm




Made of galvanized steel. Used for:

- locking position of support vertical profile (one for one support),
- locking position of inner trolley along beam (two for one inner trolley),
- installation of roller for beam on beam (two for one roller for beam).



ASB500-180 ASB500-240

Roller for support and roller for beam

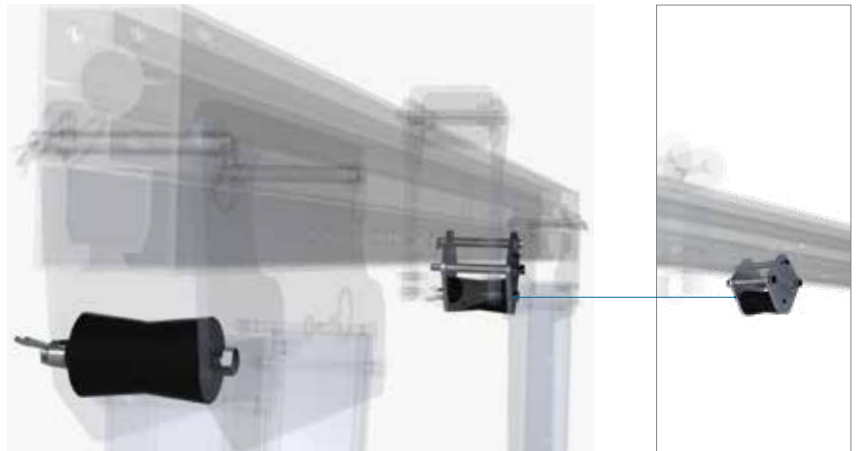


Roller for support is made of polyamide and galvanized steel. It provides work line guidance when using RUP50x-T series rescue lifting devices. The roller is installed using bolt with wing nut between two upper support plates. Roller for beam is made of strengthened aluminium alloy, stainless steel and polyamide. It provides work line guidance when using RUP50x-T series rescue lifting devices. The roller is installed on beam using pin with cotter bolt.




ASB500-370

Catch for support vertical profile pull out.

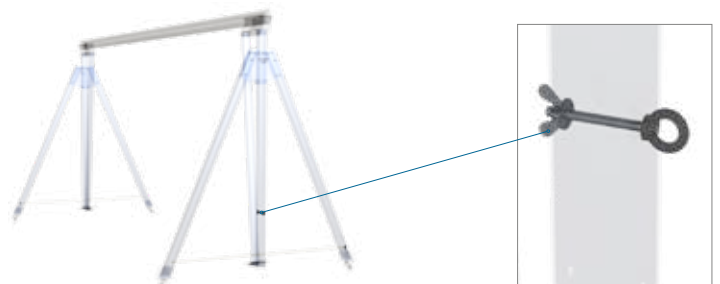

Made of stainless steel. Used when adjusting support vertical profile height when it is not possible to attach chain winch hook to the lower part of support vertical profile. Should be used with supports C1.



ASB500-560

Pin with cotter bolt 17.5mm




Pin with cotter bolt used for connecting beams to supports.



ASB500-600

Wheel support x 4

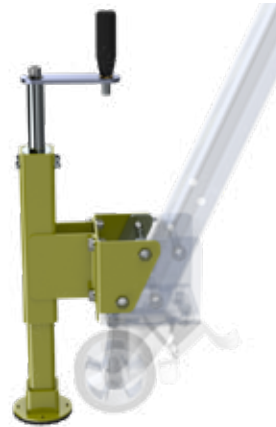


Supports made of galvanized powder-coated steel. Provide for device levelling on an uneven ground and ensure stability of the device when operating. Equipped with bolts and wing nuts for installation on support leg. Device ASB must be equipped with four wheel supports.



ASB500-813 ASB500-814

Spacers for supports 40mm and 80mm

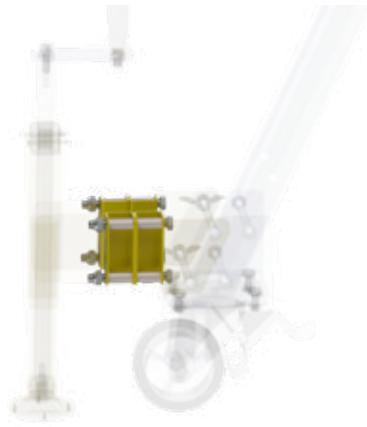

Connectors increasing the distance between support and gantry leg by 40mm (ASB500-813) and 80mm (ASB500-814).



ASB500-600

Beam transporter



Transporter made of aluminium alloy with hot-dip galvanized steel parts. Used for easy transport of the beam over long distances, equipped with solid rubber wheels dia. 200mm.

brackets




ASB500-190

Holder for rescue lifting devices RUP50x-CT



Holder for rescue lifting devices RUP50x-CT can be installed on support vertical profile. It enables installation of rescue lifting device RUP503-CT or RUP502-CT.



ASB500-570

Holder for retractable type fall arrester CRW200.



Holder for retractable type fall arrester CRW200 installed on support side platen.



ASB500-580

Holder for retractable type fall arrester CRW300.



Holder for retractable type fall arrester CRW300 installed on support side platen.




ASB500-360

Support lifting eye.



Made of aluminium/galvanized steel. Used when installing gantry for lifting and lowering of supports by chain hoist.




ASB500-800-010

Complete set of rescue lifting device with rollers.



Rescue lifting device RUP 502-CT set with 25m line and line guide rollers.
Rescue lifting device RUP 502-CT installed on all support types.
Designed for lifting of loads of up to 500kg.

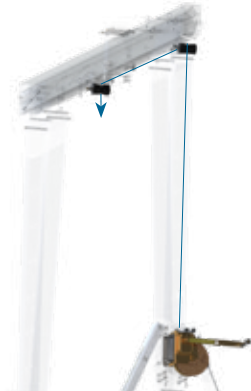

ASB500-800-020

Complete set of rescue lifting device with rollers.




Rescue lifting device RUP 502-DT set with 25m line and line guide rollers.
Rescue lifting device RUP 502-DT installed on all support types.
Designed for lifting of loads of up to 500kg.




ASB500-800-030

Complete set of rescue lifting device with rollers.

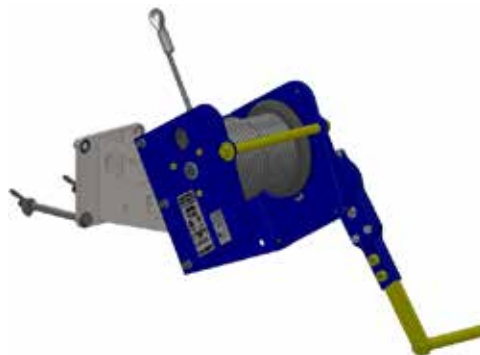

Rescue lifting device RUP 503-CT set with 50 m line and line guide rollers.
Rescue lifting device RUP 503-CT installed on all support types.
Designed for lifting of loads of up to 1000kg.




ASB500-800-040

Complete set of rescue lifting device with rollers.



Rescue lifting device RUP 503-DT set with 50 m line and line guide rollers.
Rescue lifting device RUP 503-DT installed on all support types.
Designed for lifting of loads of up to 1000kg.



wheels

W1



Set of wheels (4 pcs.) dia. 160mm. Wheels made of galvanized steel with rubber coating with a capacity of up to 1000kg.

Default for gantries ASB/LSB.
ref. no. ASB100-010

W2



Set of wheels (4 pcs.) dia. 200mm. Wheels made of galvanized steel with rubber coating with a capacity of up to 2000kg.

Default for gantries BAS/ASB
ref. no. ASB100-020

W3



Set of wheels (4 pcs.) dia. 125mm. Wheels made of aluminium with polyurethane coating with a capacity of up to 1000kg.

ref. no. ASB100-030

W4



Set of wheels (4 pcs.) dia. 200mm. Wheels made of cast iron with polyurethane coating with a capacity of up to 3000kg.

ref. no. ASB100-040

W5



Set of wheels (4 pcs.) dia. 200mm. Wheels made of aluminium with polyurethane coating. Wheels have hard tread 92 Shore A.

Load Limit is 2000kg.
ref. no. ASB100-050

W6



Set of wheels (4 pcs.) dia. 250mm. Wheels made of cast iron with polyurethane coating. Load Limit is 5000kg.

Default for gantries HSB.
ref. no. ASB100-060



HEAVY-DUTY GANTRY CRANE **HSB**



3000kg to
5000kg

EN 13001
EN 15011



FALL PROTECTION
FOR 5 USERS

EN 795/B:2012
CEN/TS 16415/B:2013



HEIGHT: 2,6m to 5,7m
BEAM LENGTH: 2m to 7m

overview



STEEL CABLE FIXED BETWEEN
SUPPORT LEGS



ASB500-250

INNER PERSONNEL
TROLLEY



HSB000-T01-000

TROLLEY




HSB000-FTx-000

SUPPORTS



HSB000-A04-000

VERTICAL LIFTING MODULE
(SOLD SEPARATELY)

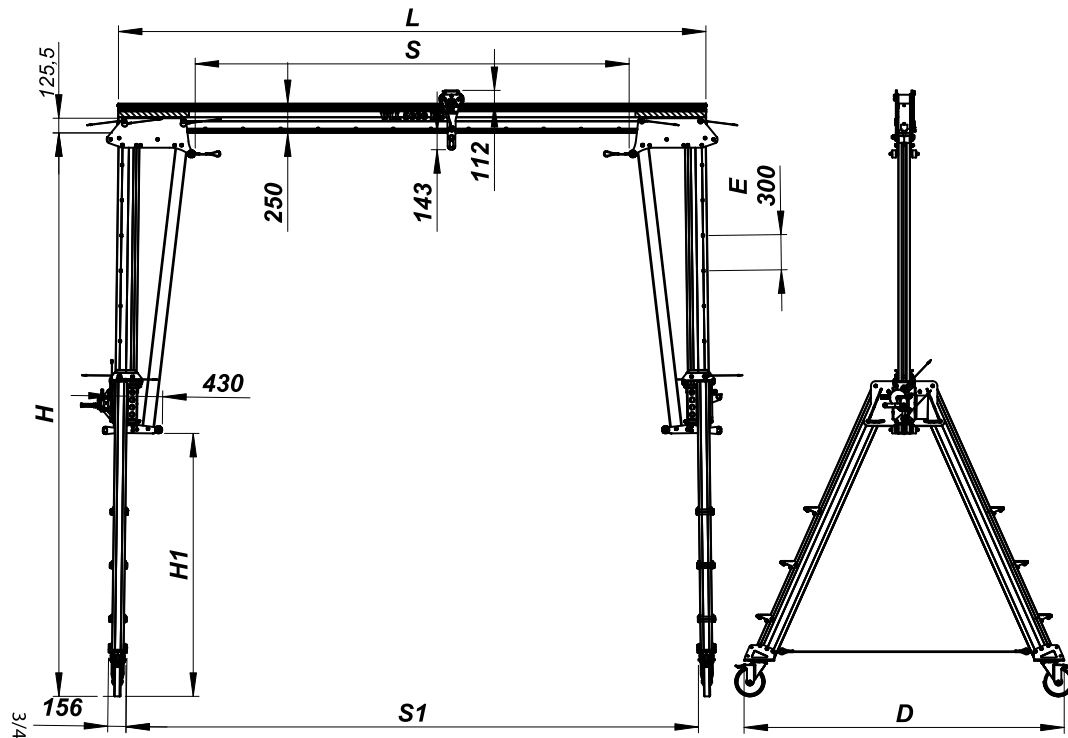

"L" Beam length [mm]	Beam weight [kg]	"S" Beam working range [mm]	"S1" Support working range [mm]	T1 SUPPORT		T2 SUPPORT		T3 SUPPORT	
				WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]	WLL [T]	Gantry weight [kg]
3000	48	1695	2874	5	275	5	299	3	323
4000	64	2695	3874	5	291	5	315	3	339
5000	80	3695	4874	5	307	5	331	3	355
6000	96	4695	5874	4	323	4	347	3	371
7000	112	5695	6874	3	339	3	363	3	387

Gantry weight [kg]	111	123	135
"H" - Working height (min... max) [mm]	2634...3834	2992...4792	3349...5749
"H1" - Height under roller (min... max) [mm]	1786	2238	2699
"D" - Leg spacing [mm]	2318	2725	3132
"E" - Working height adjustment [mm]	300	300	300

HSB REFERENCE NUMBER






HSBXXX-YY-ZZ
WHERE:



HSBXXX-YY-ZZ
 XXX - beam length [cm]
 [300 / 400 / 500 / 600 / 700]
 YY - type of supports
 [T1 / T2 / T3]
 ZZ - type of wheels in supports
 [W4 / W5 / W6]

EXAMPLE: HSB500-T2-W6 - 5-meter long beam with supports T2 equipped with wheels W6.




Parameters of available beams:

		Weight	Length	WLL
HSB-BEAM-300		48 kg	3 m	5 T
HSB-BEAM-400		64 kg	4 m	5 T
HSB-BEAM-500		80 kg	5 m	5 T
HSB-BEAM-600		96 kg	6 m	4 T
HSB-BEAM-700		112 kg	7 m	3 T

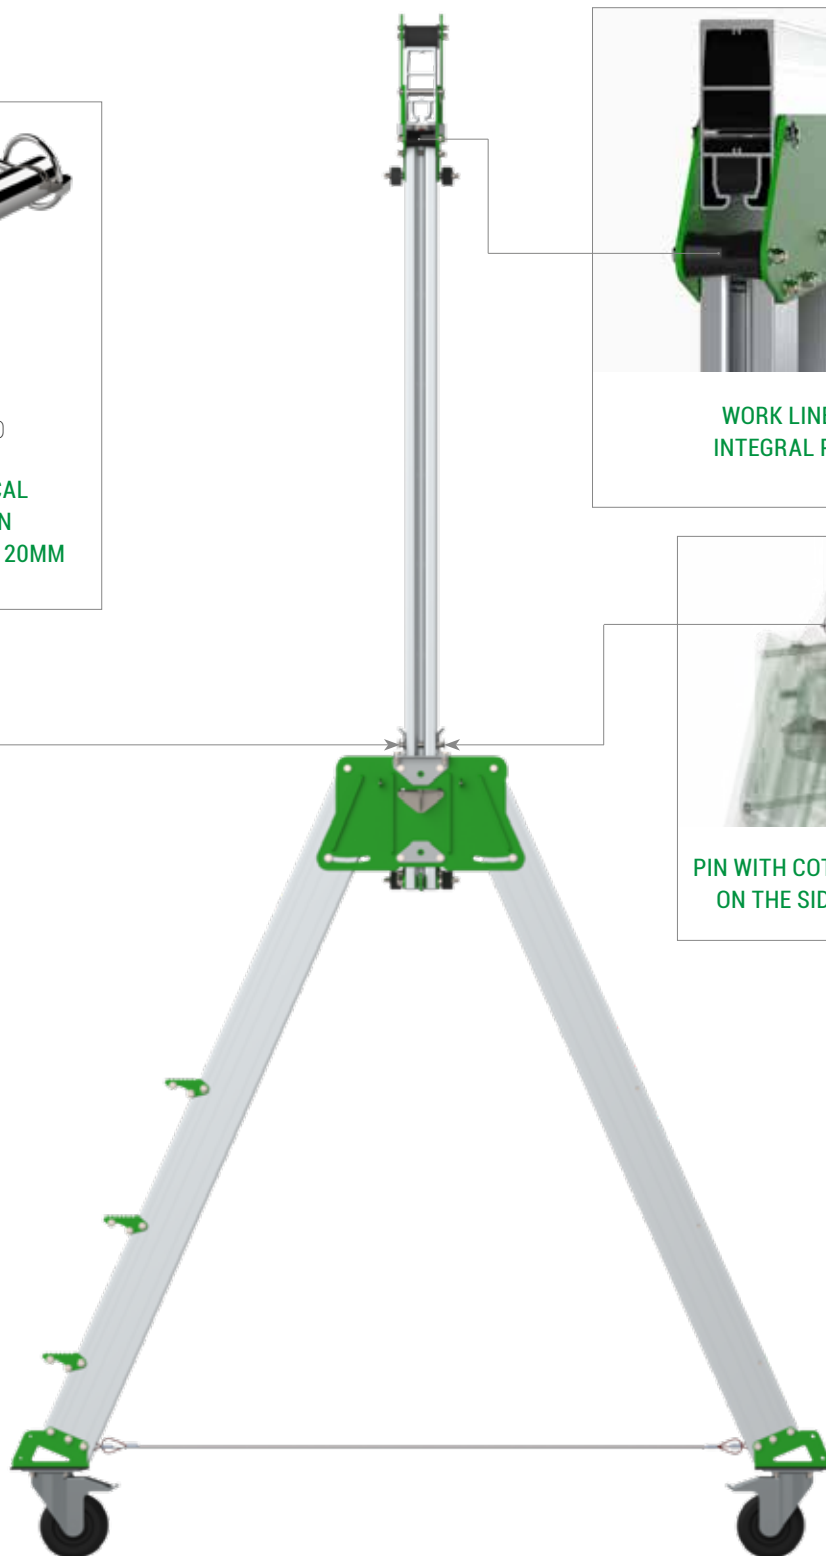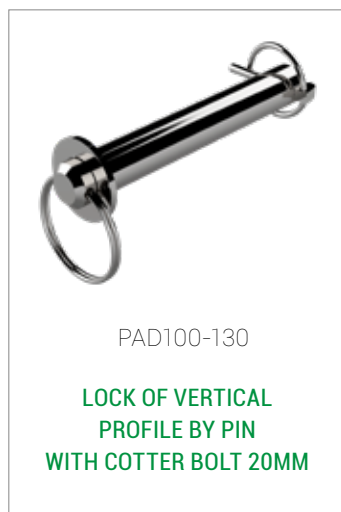

Ref. no.	Part name	Height	Weight
HSB000-FT1-000	Set of supports T1	2,6 - 3,8m	5T
HSB000-FT2-000	Set of supports T2	2,9 - 4,7m	5T
HSB000-FT3-000	Set of supports T3	3,3 - 5,7m	3T

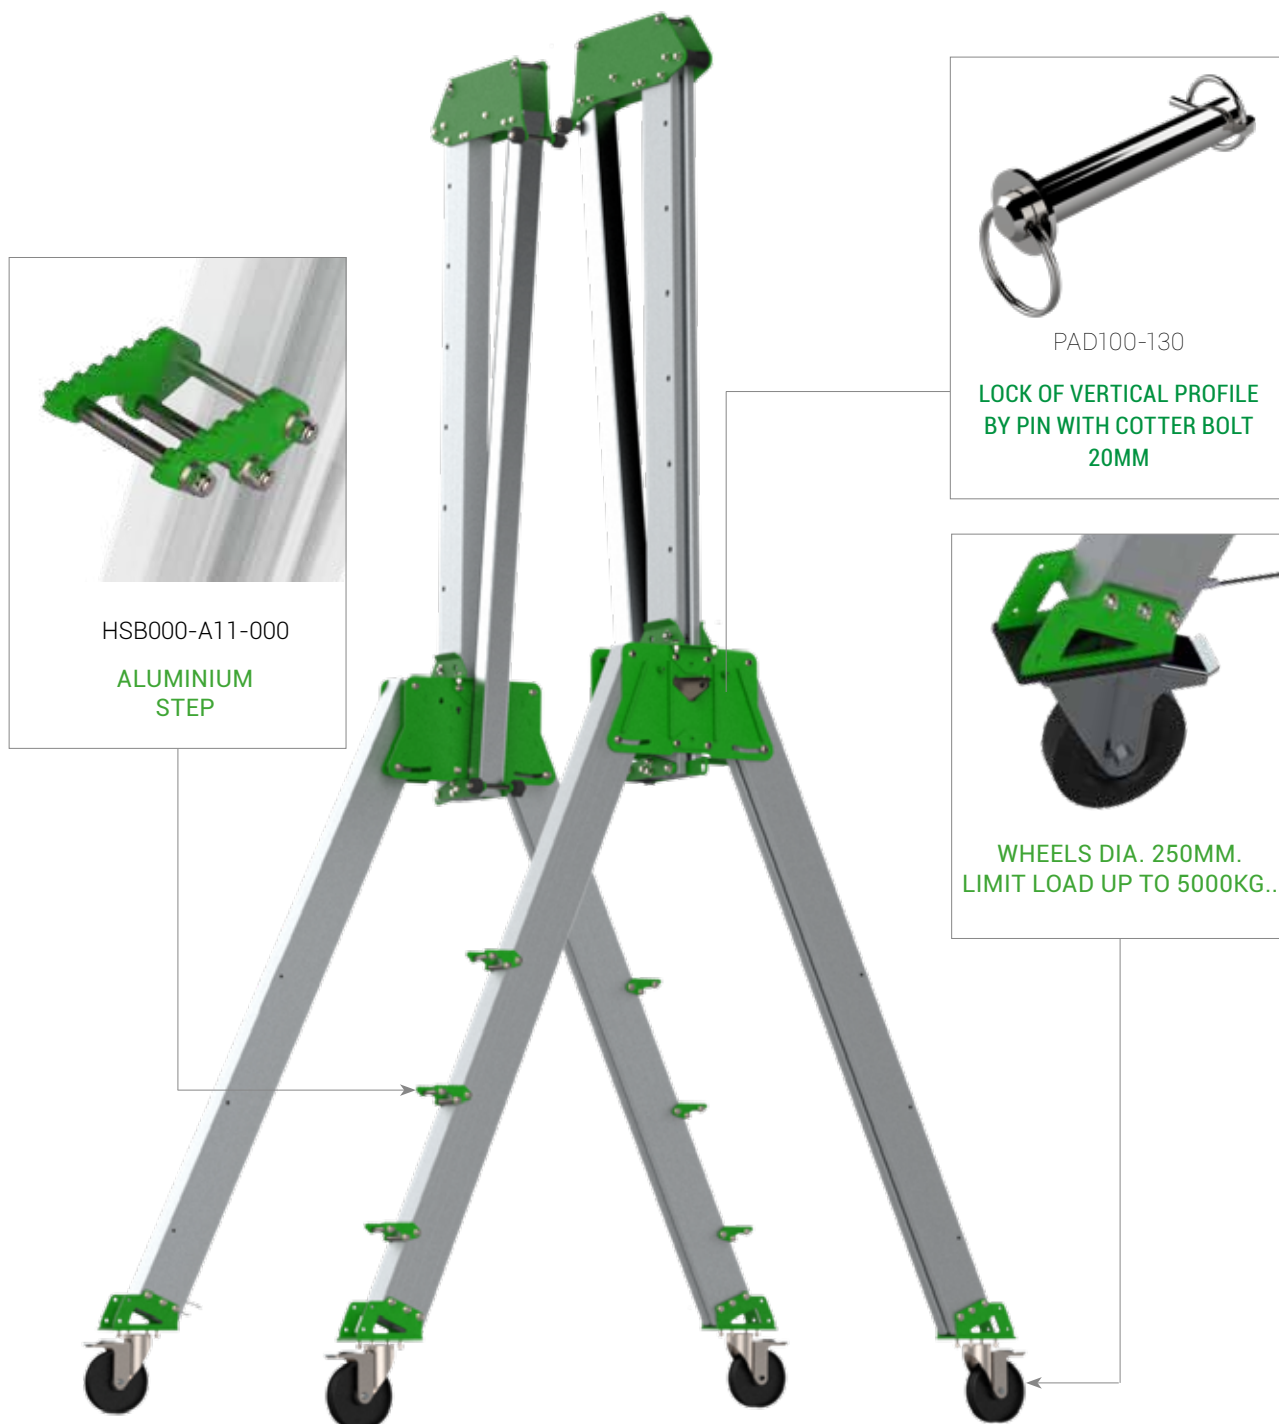



HSB000-A04-000

Vertical lifting module



Vertical lifting module used for gantry height adjustment. Sold separately. Comprises metal mounting plate and webbing winch with hook.



HSB000-A11-000

Step



Step being a permanent part of the support. Provides access to winches mounted on support main link. It is made of aluminium and stainless steel.



HSB000-T01-000

Material trolley



Material trolley enabling lifting of load of a maximum weight of up to 5T. The trolley can be removed from the beam after removing axle with bushing and hook (bolts M20).



BAS

GANTRY
CRANE



1500kg to
3500kg
EN 13001
EN 15011



FALL PROTECTION
FOR 5 USERS
EN 795/B:2012
CEN/TS 16415/B:2013




HEIGHT: 1,6m to 6,4m
BEAM LENGTH: 2m to 7m



ASB 500-200
OUTER TROLLEY





ASBxxx-001
xxx- lenght
CENTRAL BEAM



ASB500-250
INNER TROLLEY



ASB500-300
LEG SUPPORTS

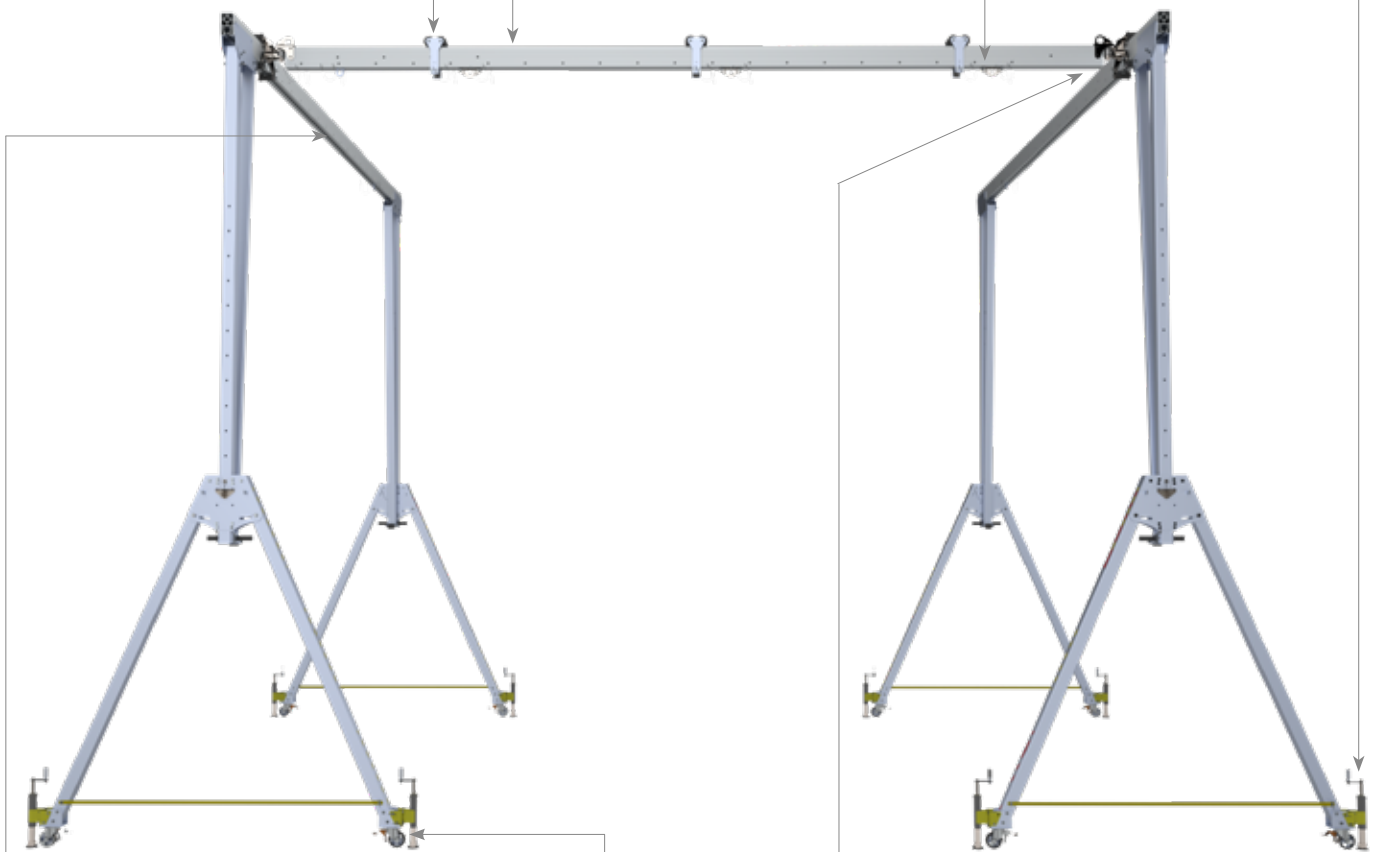

SIDE BEAMS 2X
ASBxxx-001
x- lenght




WHEELS IN
6 SIZES






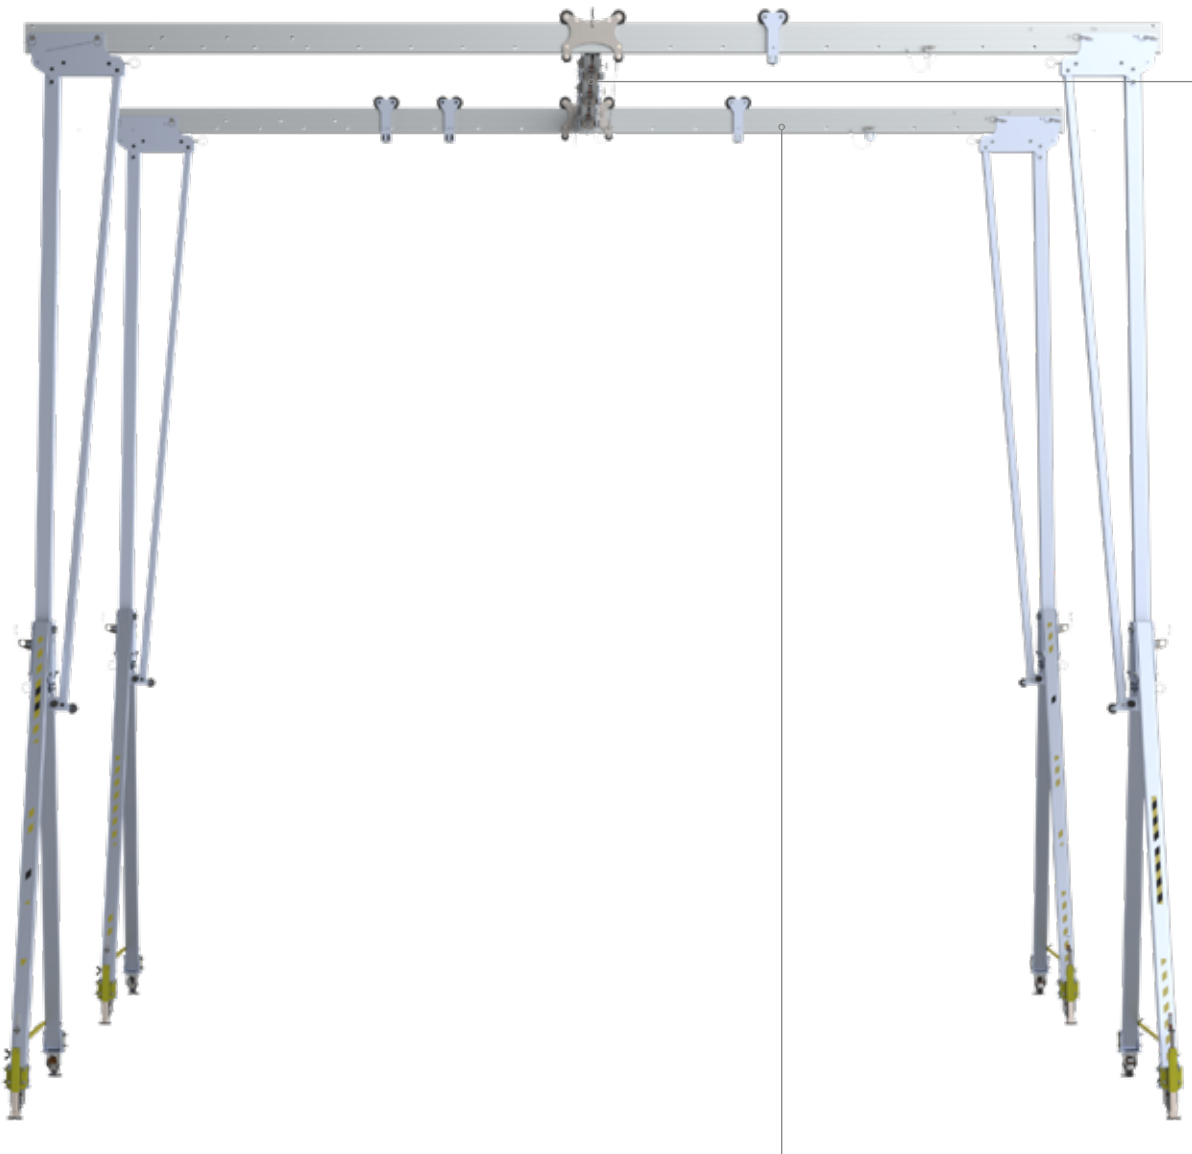


BEAM CONNECTOR 2X
ROTARY AND SLIDING CONSOLE
BAS100-300-000


beams



Parameters of available beams:

		Weight	Length	WLL*
ASB200-001		26,7 kg	2 m	3 T
ASB300-001		40,1 kg	3 m	3 T
ASB400-001		53,4 kg	4 m	3 T
ASB500-001		66,7 kg	5 m	2,5 T
ASB600-001		80,1 kg	6 m	2 T
ASB700-001		93,5 kg	7 m	1,5 T

* for kit configuration with support C2 the acceptable WLL is 1T for all beam lengths

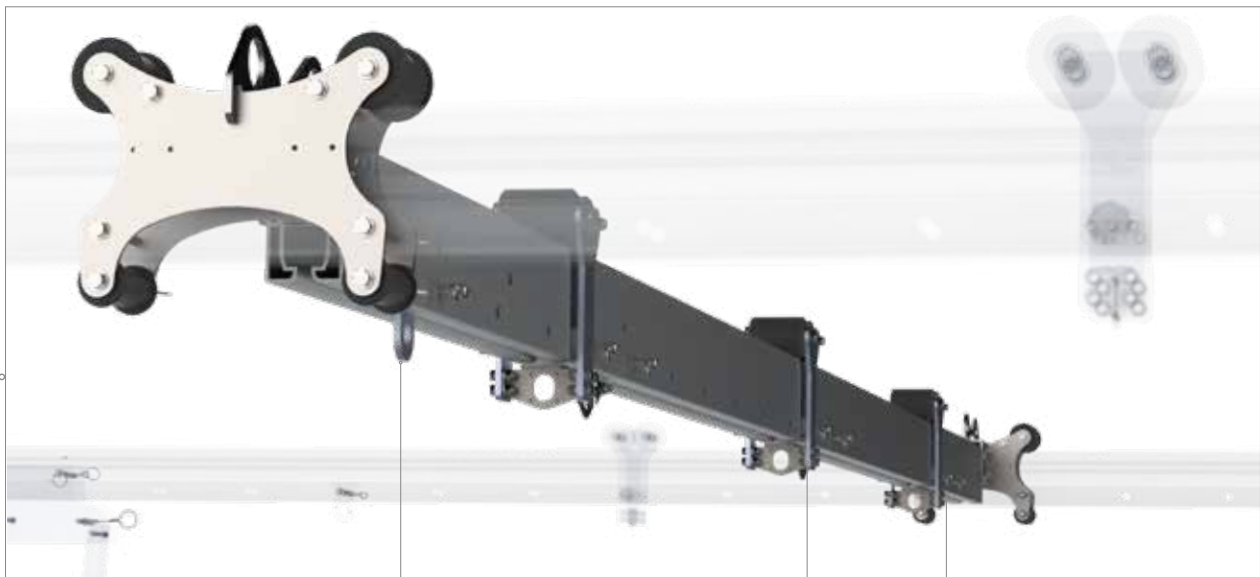

Central beam.

Inner personnel trolleys and outer material trolleys can be installed in any configuration on side beams and central beam until maximum gantry capacity is not exceeded.



 MAX 5USERS 1000 kg




ASB 500-360
SUPPORT **B1/C1**
LIFTING EYE



ASB 500-200
OUTER MATERIAL
TROLLEY



ASB500-250
INNER PERSONNEL
TROLLEY

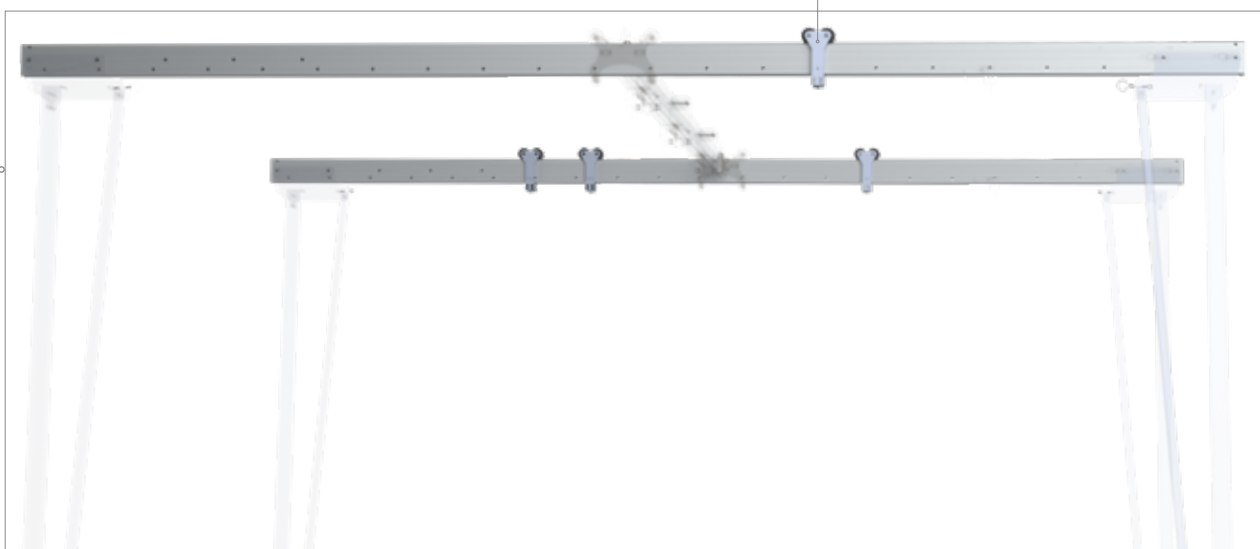

Side beams.



ASB500-140

HOIST
HOLDER



W2
Ø 200
rubber + galvanized steel



W4
Ø 200
polyurethane + cast iron




W5
Ø 200
polyurethane + aluminium



W6
Ø 200
polyurethane + cast iron

WHEEL SETS

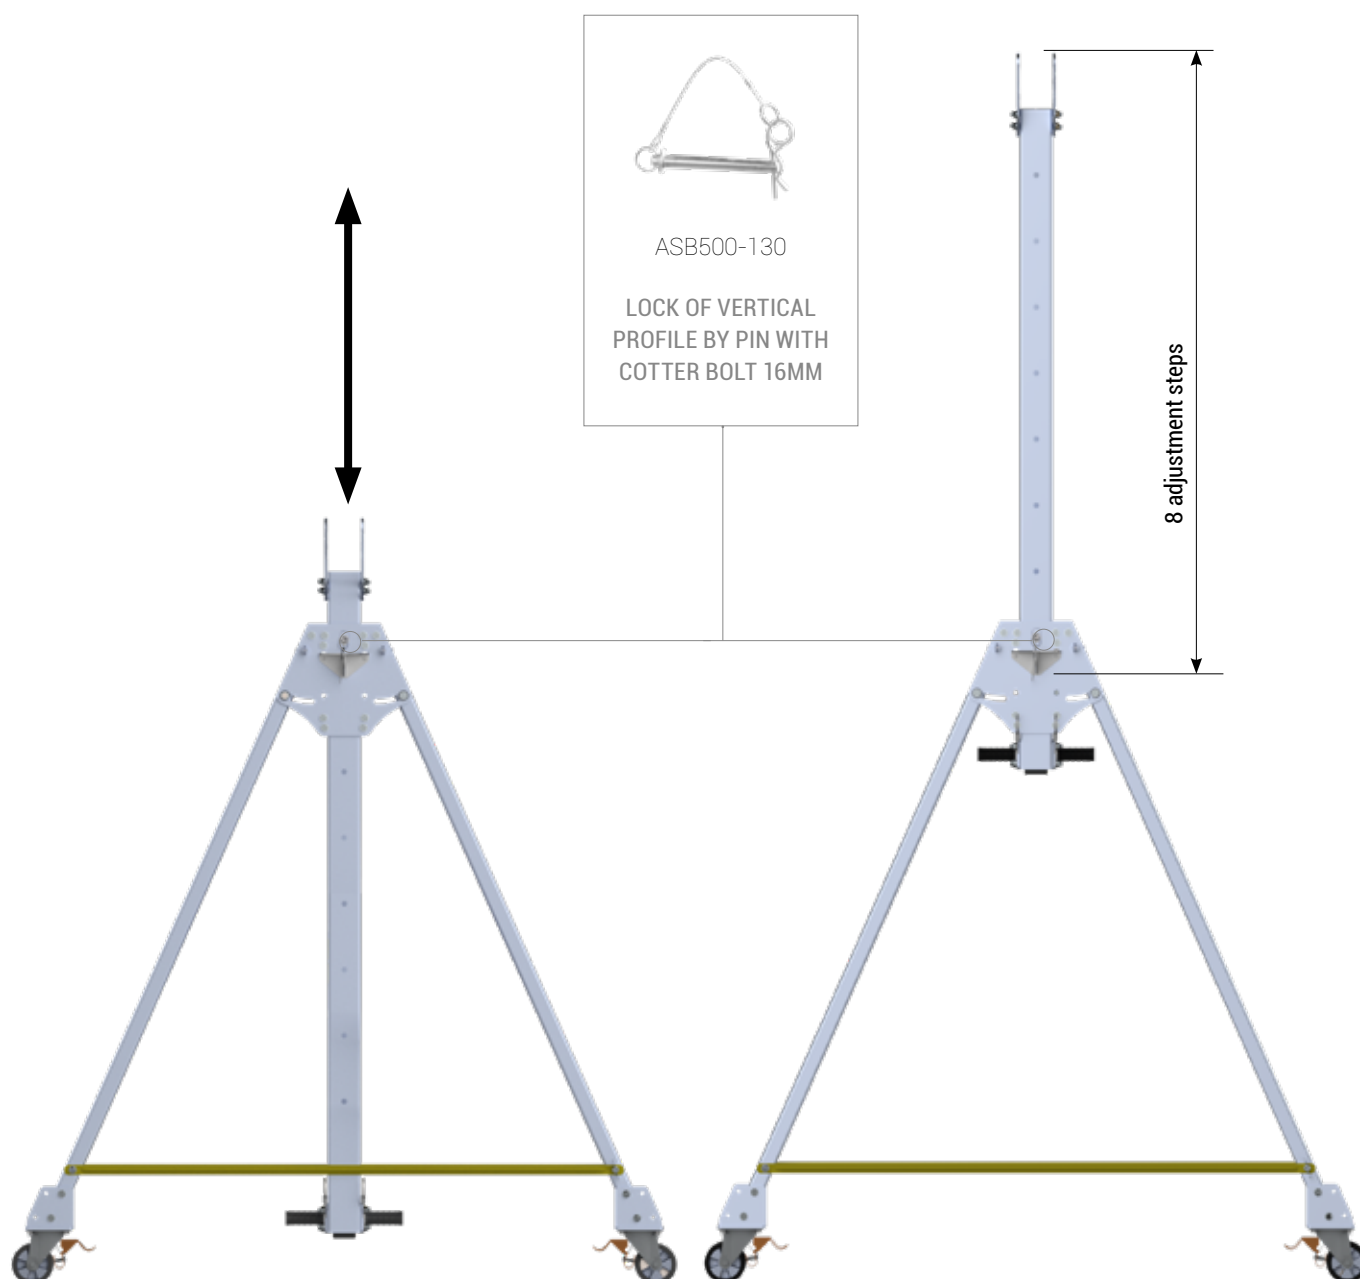


Ref. no.	Part name	Height	Weight
ASB500-450-1	Supports A1 2x	1690-2168 mm	89,88kg
ASB500-100-1	Supports B1 2x	2207-3607 mm	115,86kg
ASB500-500-1	Supports C1 2x	3230-5430 mm	159,14kg
ASB500-500-2	Supports C2 2x	4230-6430 mm	215kg


configurations



Gantry deployed in H-configuration with central beam aligned with the protected area. The most common configuration.

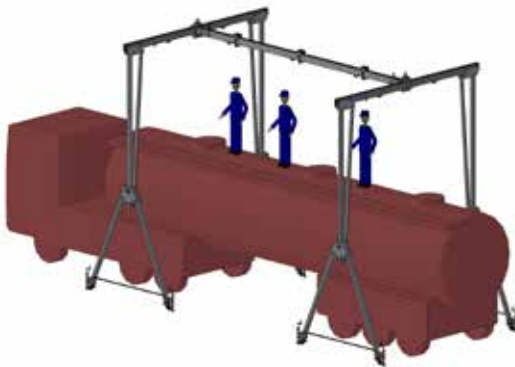

TANKER

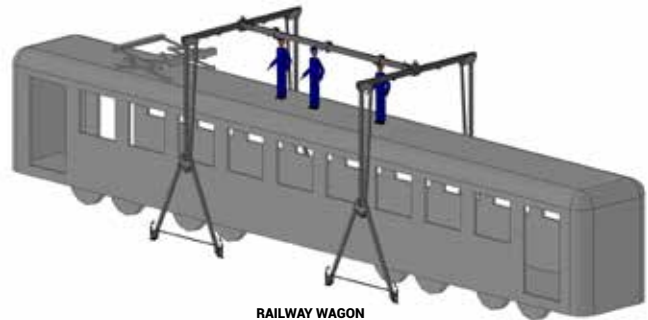

RAILWAY WAGON

Other examples of BAS system configurations






ASB500-250
Personnel trolley (inner)



Made of galvanized steel and stainless steel. Space savings - lifting eye is only 55mm under the beam. Position locking using pins with cotter bolts. Inner trolley is designed for personnel protection only. One trolley can be used by maximum one person.



ASB500-180 **ASB500-240**
Roller for support and roller for beam

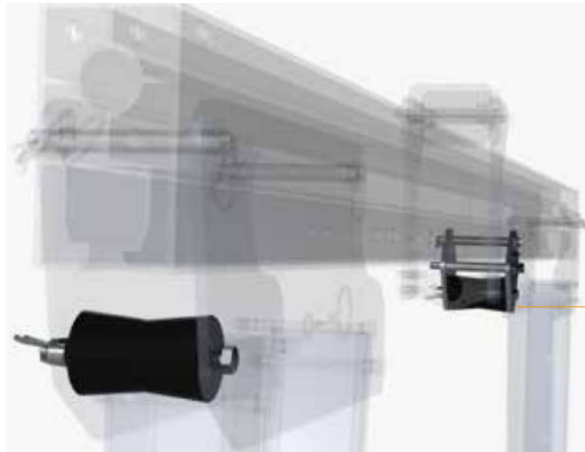

Roller for support is made of polyamide and galvanized steel. It provides work line guidance when using RUP50x-T series rescue lifting devices. The roller is installed using bolt with wing nut between two upper support plates. Roller for beam is made of strengthened aluminium alloy, stainless steel and polyamide. It provides work line guidance when using RUP50x-T series rescue lifting devices. The roller is installed on beam using pin with cotter bolt.



ASB500-600
Beam transporter



Transporter made of aluminium alloy with hot-dip galvanized steel parts. Used for easy transport of the beam over long distances, equipped with solid rubber wheels dia. 200mm.



ASB500-300

Wheel support x 4



Supports made of galvanized powder-coated steel. Provide for device levelling on an uneven ground and ensure stability of the device when operating. Equipped with bolts and wing nuts for installation on support leg. Device ASB must be equipped with four wheel supports.




ASB500-813

ASB500-814

Spacers for supports 40mm and 80mm



Connectors increasing the distance between support and gantry leg by 40mm (ASB500-813) and 80mm (ASB500-814).



ASB500-570

Holder for retractable type fall arrester CRW200



Holder for retractable type fall arrester CRW200 installed on small or medium support side platen.

W4



Set of wheels (4 pcs.) dia. 200mm. Wheels made of cast iron with polyurethane coating with a capacity of up to 3000kg.

W5



Set of wheels (4 pcs.) dia. 200mm. Wheels made of aluminium with polyurethane coating. Wheels have hard tread 92 Shore A. Load Limit is 2000kg.

W6



Set of wheels (4 pcs.) dia. 200mm. Wheels made of cast iron with polyurethane coating. Load Limit is 5000kg.

LIFTING BEAMS



77 | LIFTING BEAMS

78 TRA

80 TRB

82 TRD

86 TRO



Beam, lower catch:
Central catch:
Pins:





aluminium
galvanized, powder-coated steel
zinc-anodized steel


LIGHT
ALUMINIUM
LIFTING BEAM

TRA

Parameters of available beams:

Weight Length WLL

TRA 100		9,4 kg	1 m	2 T
TRA 200		16 kg	2 m	1,75 T
TRA 300		22,6 kg	3 m	1,25 T
TRA 400		29,2 kg	4 m	0,7 T
TRA 500		35,8 kg	5 m	0,5 T

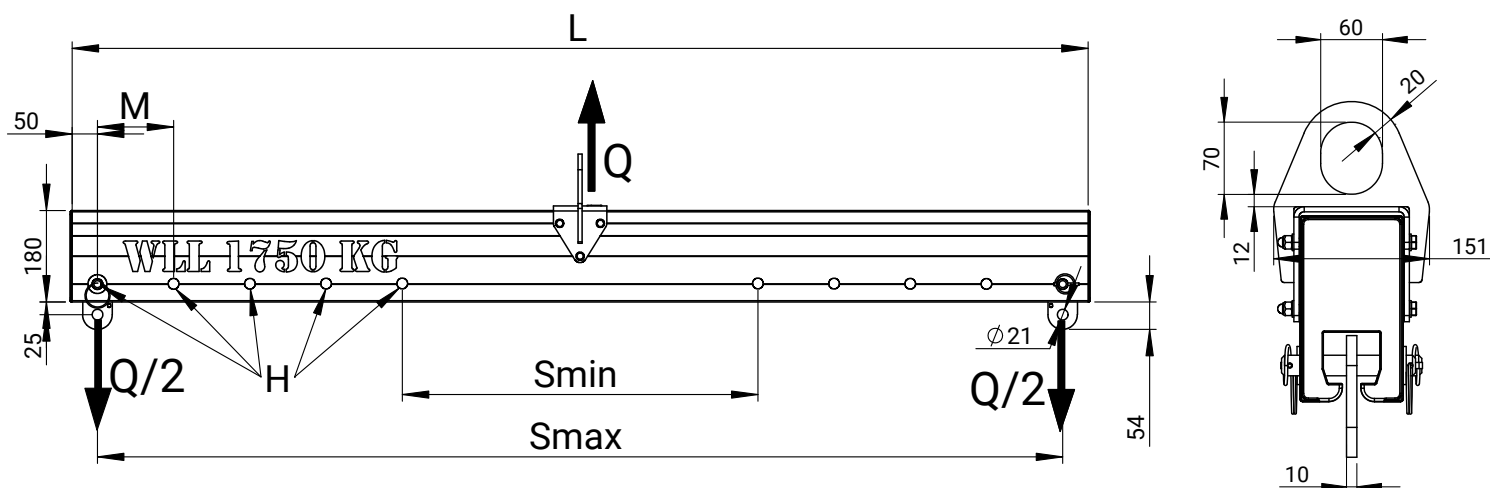

REF.NO:	L beam length [mm]	Q Working Load Limit [KG]	S _{max} [m]	S _{min} [m]	M hole spacing in adjustable beam [mm]	H number of adjustable holes (one side) [pcs.]	Weight [kg]
TRA050-H1-100-2000	0,5	2000	0,4	0,4	100	1	6,2
TRA100-H3-100-2000	1	2000	0,9	0,5	100	3	9,4
TRA150-H4-150-1750	1,5	1750	1,4	0,5	150	4	12,8
TRA200-H5-150-1750	2	1750	1,9	0,7	150	5	16,0
TRA250-H6-200-1500	2,5	1500	2,4	0,4	200	6	19,2
TRA250-H1-200-1500	2,5	1500	2,4	2,4	200	1	19,2
TRA300-H6-200-1250	3	1250	2,9	0,9	200	6	22,6
TRA350-H7-250-1000	3,5	1000	3,4	0,4	250	7	25,8
TRA400-H7-250-0750	4	750	3,9	0,9	250	7	29,2
TRA450-H7-300-0500	4,5	500	4,4	0,8	300	7	32,4
TRA500-H7-300-0500	5	500	4,9	1,3	300	7	35,8

Custom-made beams:

- Working Load Limit (WLL) of the beam cannot be changed freely (up to 1m WLL=2000kg, up to 2m WLL=1750kg, etc.),
- possible increment of overall beam length "L" is 50mm (0.05m) (minimum value is 0.5m / max 5.0m),
- possible increment of adjustment hole spacing "M" is 50mm (minimum value 100mm),
- $S_{max} [m] = L [m] - 0.1m$.

Hooks and shackles are sold separately.

TRA REFERENCE NUMBER:

TRAXXX-HX-XXX-XXXX

WHERE:


L - overall beam length [cm]
 [min. 050 - 0.5m
 100 - 1m
 150 - 1.5m
 ...
 200 - 2m
 375 - 3.75m
 max 500 - 5m
 increment: 0.05m

H - number of adjustment holes (one beam side)
 H5 - 5 holes at one side

M - adjustment hole spacing [mm]
 min. 100mm
 increment: 50mm
 the same dimension for all holes

Q - WLL [kg]
 up to 1m - 2000kg
 up to 2m - 1750kg
 up to 2.5m - 1500kg
 up to 3m - 1250kg
 up to 4m - 750kg
 up to 5m - 500kg

TRALLL-HH-MMM-QQQQ

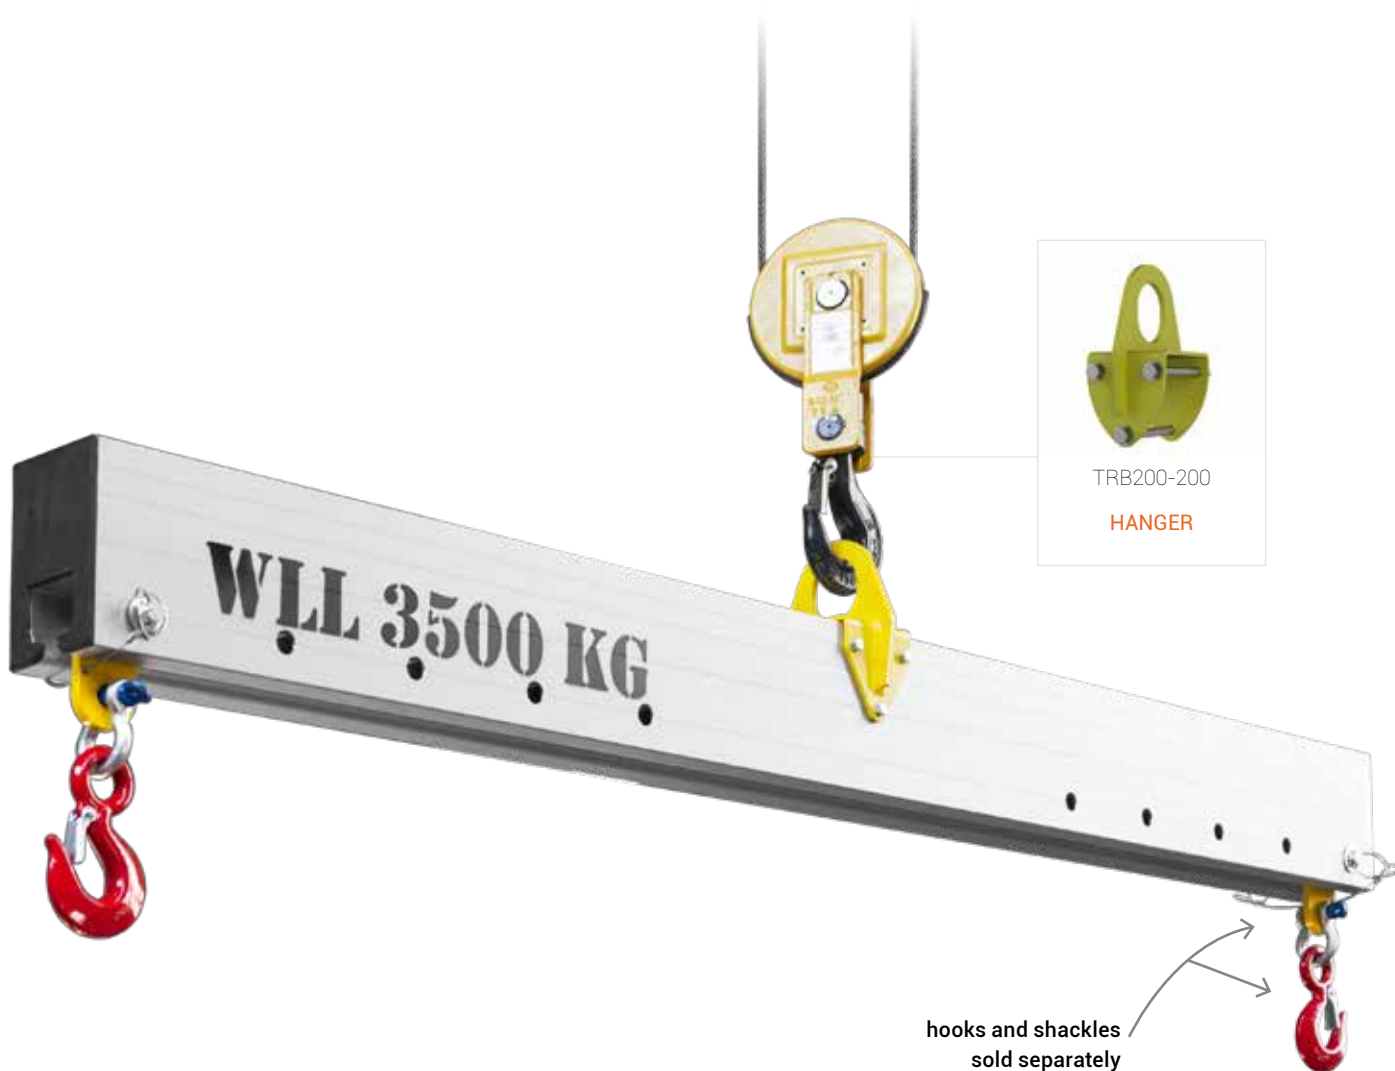




Beam, lower catch: aluminium
 Central catch: galvanized, powder-coated steel
 Pins: zinc-anodized steel

HEAVY
 ALUMINIUM
 LIFTING
 BEAM


TRB

Parameters of available beams:

Weight Length WLL

TRB 100		16,7 kg	1 m	4 T
TRB 200		30 kg	2 m	3,5 T
TRB 300		43 kg	3 m	2,5 T
TRB 400		56,7 kg	4 m	1,75 T
TRB 500		70,1 kg	5 m	1,25 T

TRB - technical data

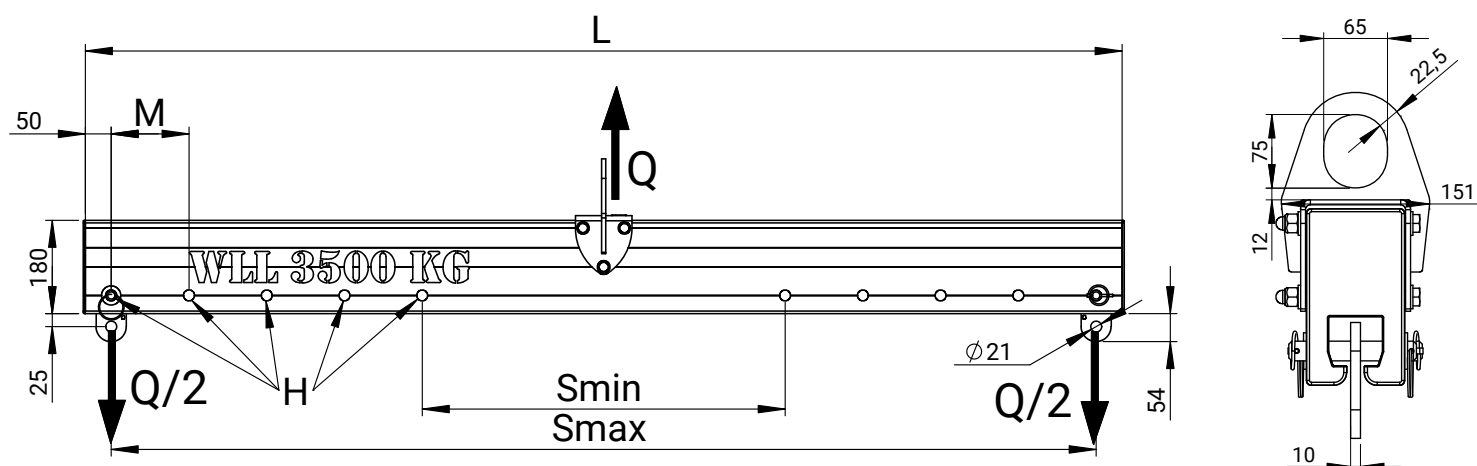

REF. NO.:	L beam length [mm]	Q Working Load Limit [kg]	Smax [m]	Smin [m]	M hole spacing in adjustable beam [mm]	H number of adjustable holes (one side) [pcs.]	Weight [kg]
TRB050-H1-100-4000	0,5	4000	0,4	0,4	100	1	10,0
TRB100-H3-100-4000	1	4000	0,9	0,5	100	3	16,7
TRB150-H4-150-3500	1,5	3500	1,4	0,5	150	4	23,4
TRB200-H5-150-3500	2	3500	1,9	0,7	150	5	30,0
TRB250-H6-200-3000	2,5	3000	2,4	0,4	200	6	36,7
TRB250-H1-200-3000	2,5	3000	2,4	2,4	200	1	36,7
TRB300-H6-200-2500	3	2500	2,9	0,9	200	6	43,4
TRB350-H7-250-2000	3,5	2000	3,4	0,4	250	7	50,1
TRB400-H7-250-1750	4	1750	3,9	0,9	250	7	56,7
TRB450-H7-300-1500	4,5	1500	4,4	0,8	300	7	63,4
TRB500-H7-300-1250	5	1250	4,9	1,3	300	7	70,1

Custom-made beams:

- Working Load Limit (WLL) of the beam cannot be changed freely (up to 1m WLL=4000kg, up to 2m WLL=3500kg, etc.),
- possible increment of overall beam length "L" is 50mm (0.05m) (minimum value is 0.5m / max 5.0m),
- possible increment of adjustment hole spacing "M" is 50mm (minimum value 100mm),
- $S_{max} [m] = L [m] - 0.1m$.

Hooks and shackles are sold separately.

TRB REFERENCE NUMBER

TRBLLL-HH-MMM-QQQQ
WHERE:



TRBLLL-HH-MMM-QQQQ

L - overall beam length [cm]
min. 050 - 0.5m
100 - 1m
150 - 1.5m
...
200 - 2m
3.75 - 3.75m
max 500 - 5m
increment: 0.05m

H - number of adjustment holes (one beam side)
H3 - 3 holes at one side

M - adjustment hole spacing [mm]
min. 100mm
increment: 50mm
the same dimension for all holes

Q - WLL [kg]
up to 1m - 4000kg
up to 2m - 3500kg
up to 2.5m - 3000kg
up to 3m - 2500kg
up to 3.5m - 2000kg
up to 4m - 1750kg
up to 4.5m - 1500kg
up to 5m - 1250kg

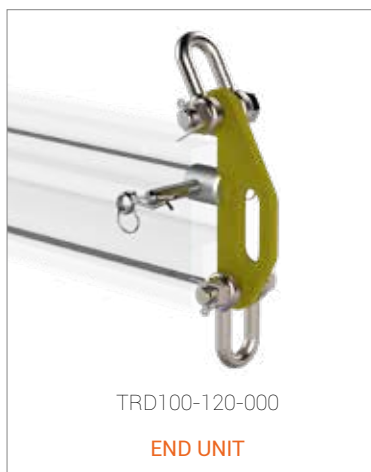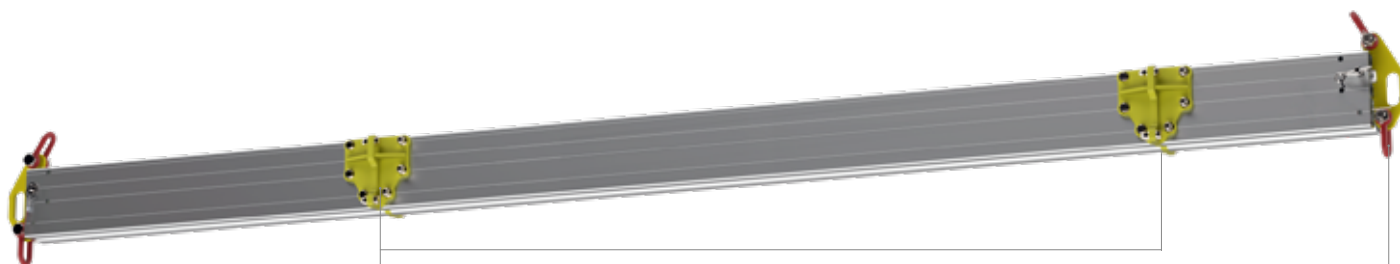

MODULAR
ALUMINIUM
CROSS-BEAM

TRD

Beam, lower catch:
Central catch:
Pins:


aluminium
galvanized, powder-coated steel
zinc-anodized steel

BEAM LENGTH:

0.5m to 5m

WLL:

1250kg to 4000kg

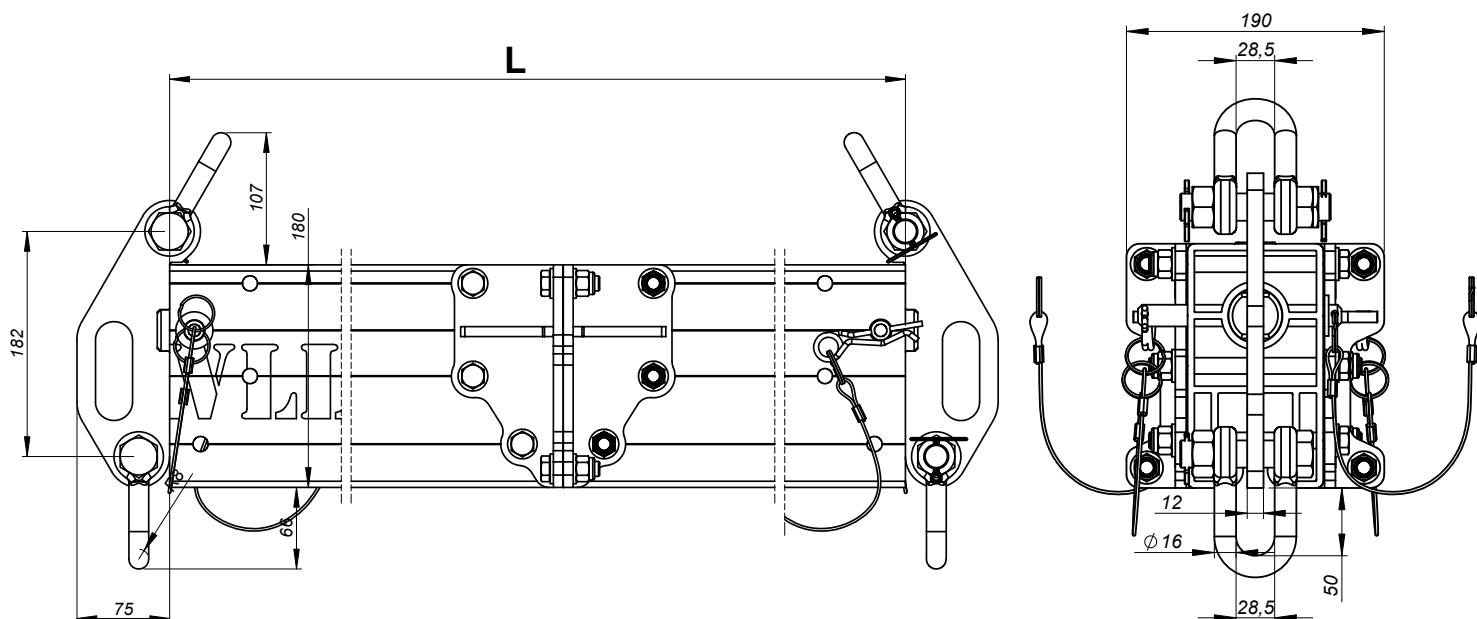




REF. NO.:

WEIGHT

TRD100-115-000	module connector	2,35 kg
TRD100-120-000	end unit	3,02 kg
TRD050-000-001	beam module length 0.5m	6,68 kg
TRD100-000-001	beam module length 1.0m	13,35 kg
TRD200-000-001	beam module length 2.0m	26,7 kg



Expansion beam TRD has a modular design. Each beam comprises two end units equipped with attachment points as shackles. End unit can be installed on the beam using pins with cotter bolt. Beam span can be constructed by means of three partial beams (sizes: 0.5 / 1.0 / 2.0m) using beam connectors.

REF. NO.:	L beam length [mm]	WLL Working Load Limit [kg]	WEIGHT [kg]	TRD050-000-001	TRD100-000-001	TRD200-000-001	TRD100-115-000	TRD100-130-000
								
TRD050-000-000	0,5	3000	12,7	1				2
TRD100-000-000	1,0	3000	19,4		1			2
TRD150-000-000	1,5	3000	28,4	1	1		1	2
TRD200-000-000	2,0	3000	32,7			1		2
TRD250-000-000	2,5	3000	41,8	1		1	1	2
TRD300-000-000	3,0	3000	48,4		1	1	1	2
TRD350-000-000	3,5	3000	57,5	1	1	1	2	2
TRD400-000-000	4,0	3000	59,4			2		2
TRD450-000-000	4,5	3000	68,5	1		2	1	2
TRD500-000-000	5,0	3000	75,1		1	2	1	2
TRD550-000-000	5,5	3000	84,2	1	1	2	2	2
TRD600-000-000	6,0	3000	86,1			3		2
TRD650-000-000	6,5	3000	95,2	1		3	1	2
TRD700-000-000	7,0	3000	99,5		1	3		2



TRB200-200

HANGER

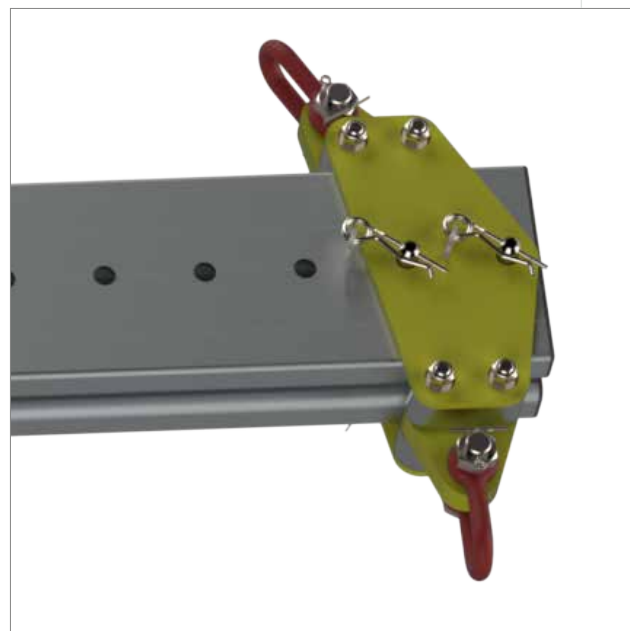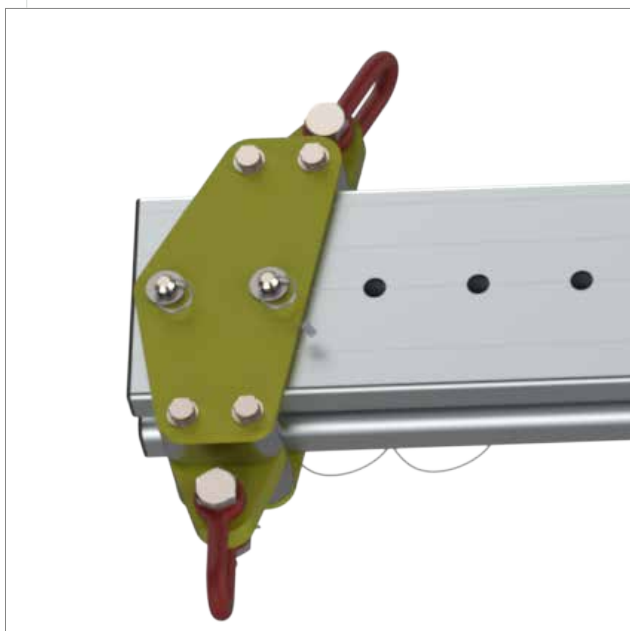

TRD100-120-000

END UNITS

ONE-PIECE
ALUMINIUM
EXPANSION
BEAM

TRO

Beam, lower catch:
Central catch:
Pins:

aluminium
galvanized, powder-coated steel
zinc-anodized steel


BEAM LENGTH:

1.5m to 7.0mm

WLL:

3500 kg

TRO - technical data

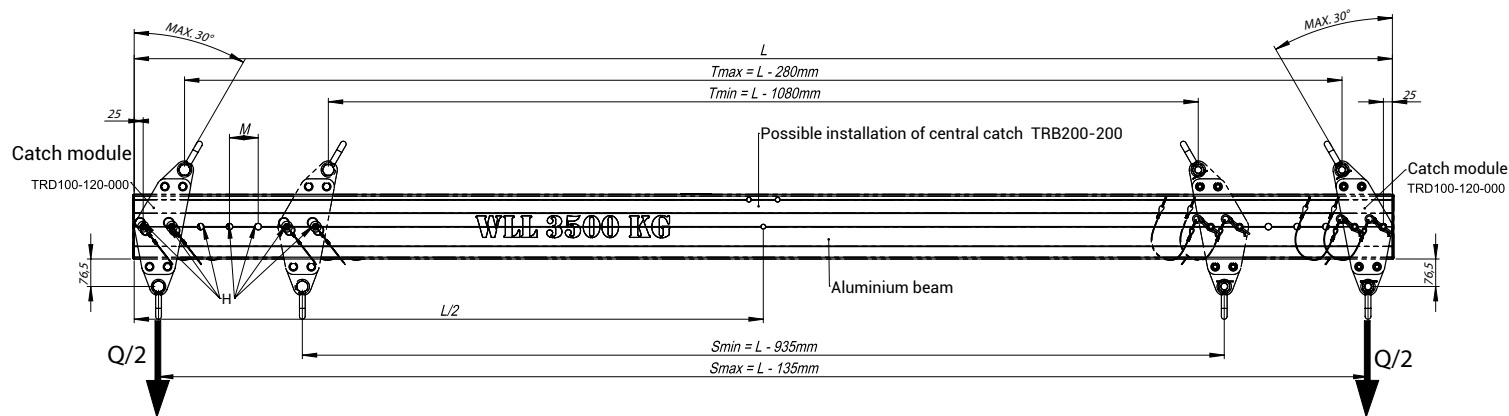

REF. NO.:	L beam length [mm]	Q Working Load Limit [kg]	Smax [m]	Smin [m]	Tmax [m]	Tmin [m]	M hole spacing in adjustable beam [mm]	H number of ad- justable holes (one side) [pcs.]	WEIGHT [kg]
TRO150-H7-080-3500	1,5	3500	1,365	0,565	1,22	0,42	080	7	31,4
TRO200-H7-080-3500	2	3500	1,865	1,065	1,72	0,92	080	7	38,1
TRO250-H7-080-3500	2,5	3500	2,365	1,565	2,22	1,42	080	7	44,8
TRO250-H7-080-3500	2,5	3500	2,365	1,565	2,22	1,42	080	7	44,8
TRO300-H7-080-3500	3	3500	2,865	2,065	2,72	1,92	080	7	51,4
TRO350-H7-080-3500	3,5	3500	3,365	2,565	3,22	2,42	080	7	58,1
TRO400-H7-080-3500	4	3500	3,865	3,065	3,72	2,92	080	7	64,8
TRO450-H7-080-3500	4,5	3500	4,365	3,565	4,22	3,42	080	7	71,5
TRO500-H7-080-3500	5	3500	4,865	4,065	4,72	3,92	080	7	78,1
TRO550-H7-080-3500	5,5	3500	5,365	4,565	5,22	4,42	080	7	84,8
TRO600-H7-080-3500	6	3500	5,865	5,065	5,72	4,92	080	7	91,5
TRO650-H7-080-3500	6,5	3500	6,365	5,565	6,22	5,42	080	7	98,2
TRO700-H7-080-3500	7	3500	6,865	6,065	6,72	5,92	080	7	104,8

One-piece expansion beam TRO is a support device designed for use when handling lifted long loads with a maximum weight of "Q" [kg]. Overall beam length is marked as "L" [m]. Span of lower holders of catch module TRD100-120-000 is adjustable between "Smax" and "Smin" with increment "M" [mm] in "H-2" hole positions (similarly to span of upper holders "Tmax" and "Tmin"). Complete beam TRO includes aluminium beam of an adequate length and two catch modules TRD100-120-000 with shackles.

Maximum deflection from the vertical of the sling connected to the upper catch cannot exceed MAX. 30°. In the central part of the beam central catch TRB200-200 can be installed.

TRO REFERENCE NUMBER

TRO350-H7-080-3500
WHERE:

TROLL-HH-080-3500


- L** - overall beam length [cm]
min. 150 - 1m
200 - 2m
250 - 2.5m
...
600 - 6m
650 - 6.5m
max 700 - 7m
increment: 0.5m
- H** - number of adjustment holes (one beam side)
H3 - 3 holes at one side
- M** - adjustment hole spacing [mm]
CONSTANT VALUE
M=80mm
the same dimension for each hole
- Q** - WLL [kg]
CONSTANT VALUE 3500kg

MOBILE HOME LIFTING BEAM

TRM

Beam, lower catch: aluminium
Central catch: galvanized, powder-coated steel
Pins: zinc-anodized steel

BEAM LENGTH: 3.5m - 5 m
HOLE SPACING: 80 mm
WLL: 3000 kg

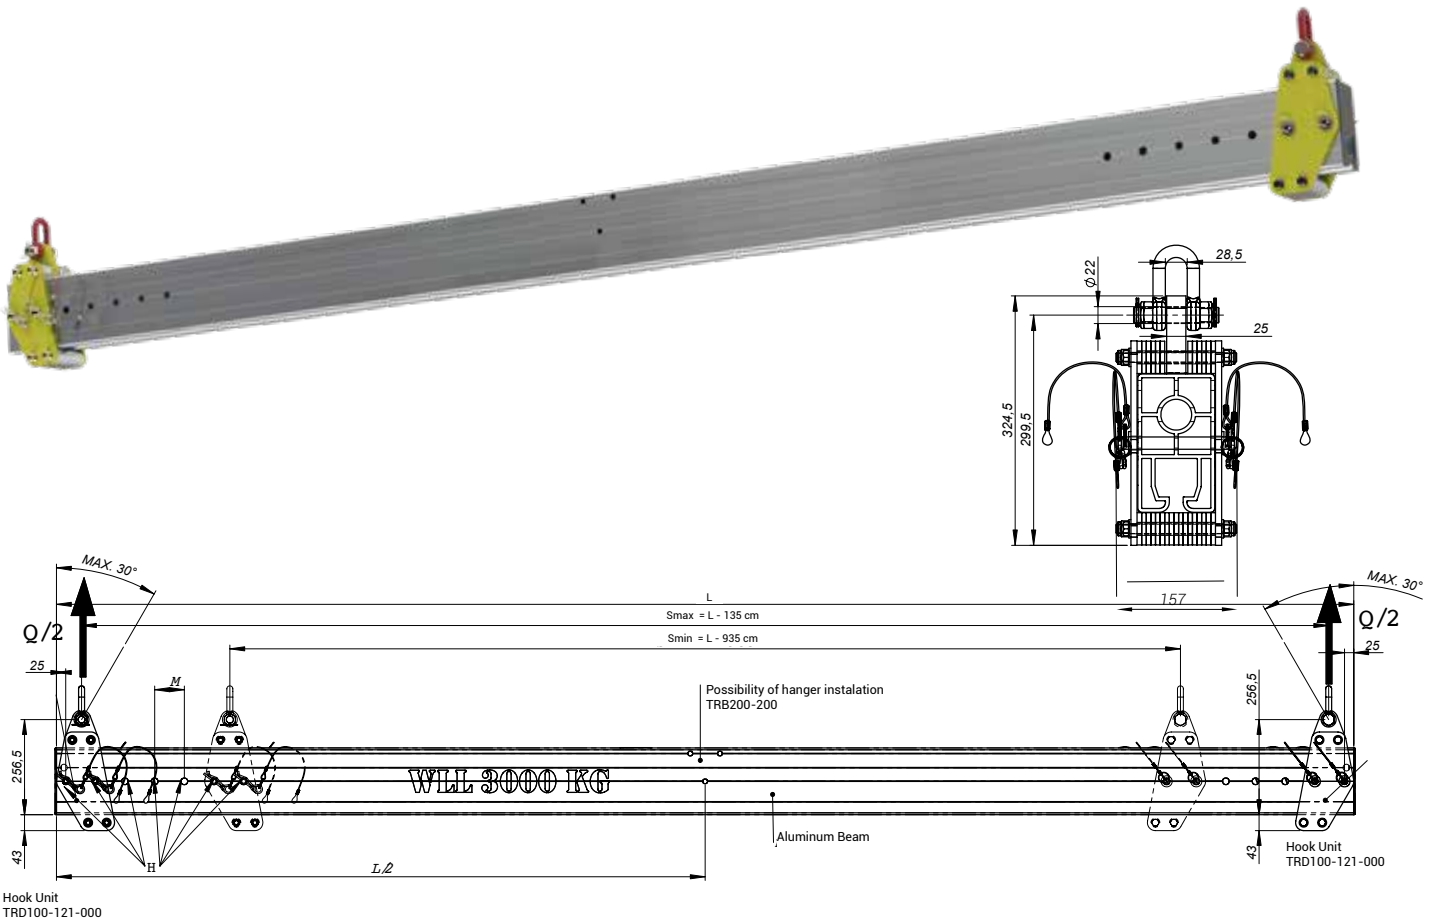

REF	L [m]	Q - WLL [kg]	Smax [m]	Smin [m]	Tmax [m]	Tmin [m]	M hole step [mm]	H holes one side [pcs]	Weight [kg]
TRM350-H7-080-3000	3,5	3000	3,365	2,565	3,22	2,42	080	7	46,73
TRM500-H7-080-3000	5	3000	4,865	4,065	4,72	3,92	080	7	66,75

TRM350-H7-080-3000
WHERE:

TRMLLL-H7-080-3000

L - overall beam length [cm]
350 - 3m
500 - 5m

H - number of adjustment holes (one beam side)
H7 - 7 holes at one side CONSTANT VALUE

M - adjustment hole spacing [mm]
CONSTANT VALUE
M=80mm
the same dimension for each hole

q - WLL [kg]
CONSTANT VALUE 3000kg



TRD -MODULAR ALUMINIUM CROSS-BEAM

**COMMERCIAL, TECHNICAL
AND ADMINISTRATIVE OFFICES**

Corso Roma, 40 • 12038 Savigliano (CN) • Italy

SALES DIRECTION

Dott. Lorenzo BOSIO

commerciale@sinecuraengineering.it

Cel: +39.333.7428737

Tel: +39.0172.750103

Fax: +39.0172.750387

TECHNICAL & ENGINEERING DIRECTION:

executive planning, structural calculations
and checks, testing and revision
of anti fall systems.

Dott. Ing. Gabriele AIMAR

Dott. Ing. Andrea ALBERTO

ingegneria@sinecuraengineering.it

tecnico@sinecuraengineering.it

Tel: +39.0172.750103

Fax: +39.0172.750387

ADMINISTRATIVE MANAGEMENT:

amministrazione@sinecuraengineering.it

Tel: +39.0172.750103

Fax: +39.0172.750387

www.sinecuraengineering.it

info@sinecuraengineering.it

